



1.00*1.00mm (0.039"*0.039") Pin Header, Dual Row, SMT Type H=1.00/1.50 mm

SPECIFICATIONS



Current Rating : 0.75AMP
 Contact Resistance : 30mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : 500V AC/minute
 Operation Temperature: -40° C to +105° C
 Contact Material : Phosphor Bronze
 Contact plating : Gold Flash Plated
 Insulator Material : High Temperature Thermoplastic (UL94V-0)
 Standard: PA6T+30%G.F

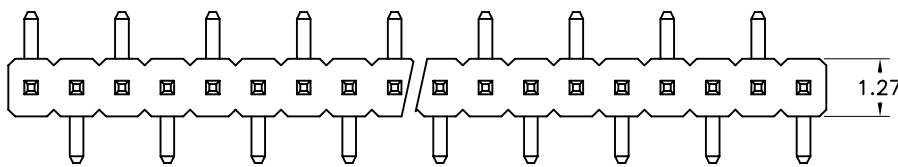

B TYPE

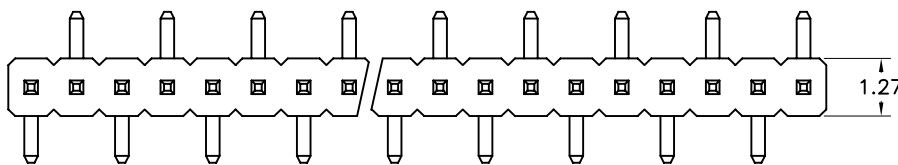


A TYPE

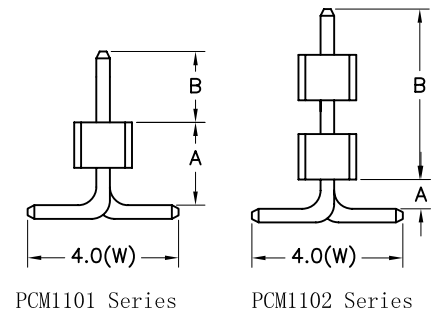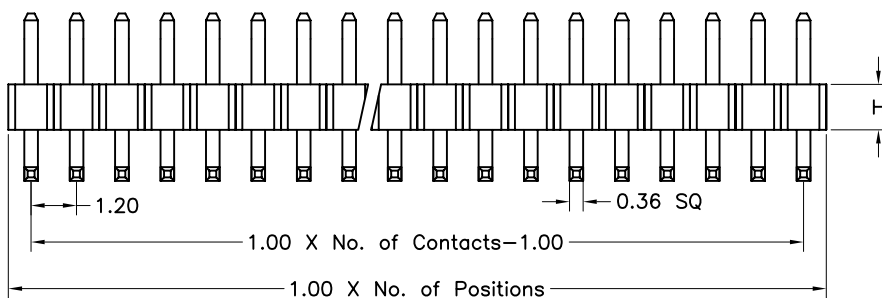

PCM1101 Series

PCM1102 Series

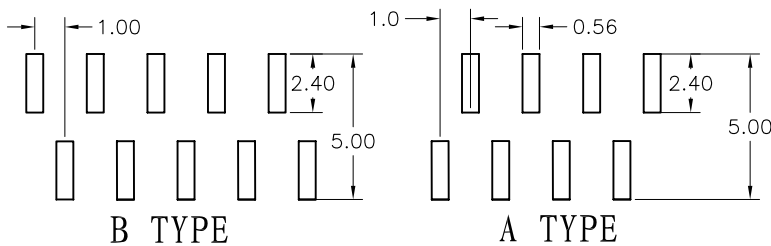

B TYPE

A TYPE

Recommended PCB Layout

H	1.0	1.5
---	-----	-----

Pin Length = $A+B+W/2$

Ordering Information

PEM1101 /PEM1102	- XX	XX	A	XX	B 1 A	X
Plastics Height 10:1.0mm 15:1.5mm	No. of Pins Per Row 02~50	Contact Plating 01:Gold Flash 02:Gold 2μ'' 03:Gold 3μ'' 04: Tin Duplex Plating 06:Gold Flash/Tin(100μ'')		Serial Number	Material Type A:PBT B:NYLON 6T C:LCP D:NYLON 9T	Options A:BAG B:TRAY C:TUBE D:TAPE REEL