
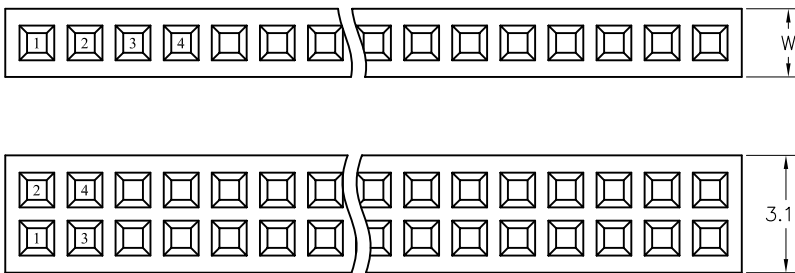




1.27mm (0.050") Female Header, Single/Dual Row, Straight Type H=2.00mm

## SPECIFICATIONS

Current Rating : 1AMP  
 Contact Resistance : 20mΩ Max.  
 Insulation Resistance: 1000MΩ Min.  
 Withstanding Voltage : 500V AC/minute  
 Operation Temperature: -40° C to +105° C  
 Contact Material : Phosphor Bronze  
 Contact plating : Gold Flash Plated  
 Insulator Material : High Temperature Thermoplastic (UL94V-0)  
 Standard: PA6T+30%G.F

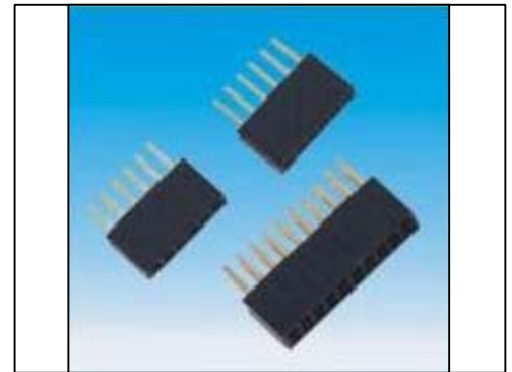


H	2.0	3.4	4.3
D	1.8	2.8	2.8/2.4
W	2.0	1.8/2.1	1.8/2.1

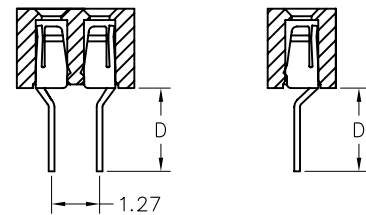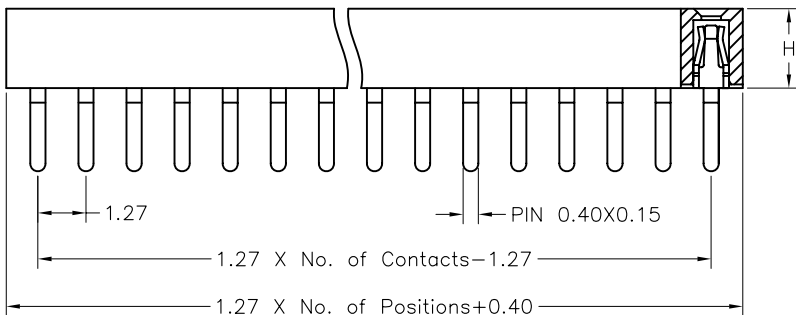

FCS2201 Series    FCS1201 Series

H	2.0	3.4	4.3
---	-----	-----	-----

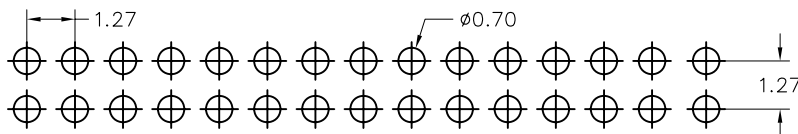

Recommended PCB Layout

## Ordering Information

FCS1201 /FCS1202	- XX	XX	A	XX	B 1 A	X
Plastics Height 20: 2.0mm 34: 3.4mm 43: 4.3mm	No. of Pins Per Row 02~50	Contact Plating 01: Gold Flash 02: Gold 2μ'' 03: Gold 3μ'' 04: Tin Duplex Plating 06: Gold Flash/Tin(100μ'')		Serial Number	Material Type A: PBT B: NYLON 6T C: LCP D: NYLON 9T	Options A: BAG B: TRAY C: TUBE D: TAPE REEL