



1.27mm (0.050") Female Header, Single Row, SMT Type H=2.10mm

SPECIFICATIONS

Current Rating : 1AMP
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : 500V AC/minute
 Operation Temperature: -40° C to +105° C
 Contact Material : Phosphor Bronze
 Contact plating : Gold Flash Plated
 Insulator Material : High Temperature Thermoplastic (UL94V-0)
 Standard: PA6T+30%G.F


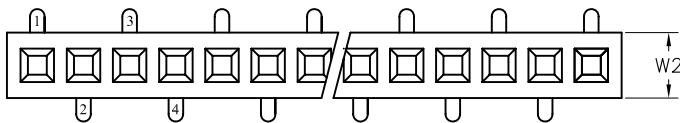


B TYPE

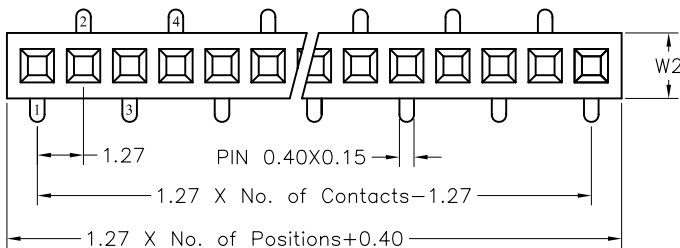


A TYPE

H	2.0	3.4	4.3
W1	3.0	3.7	3.5
W2	2.0	1.8/2.1	1.8/2.1

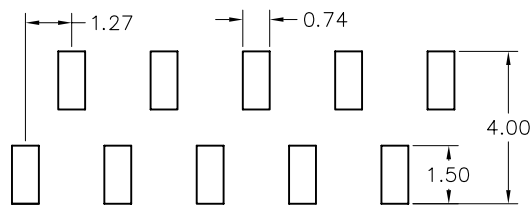

A TYPE

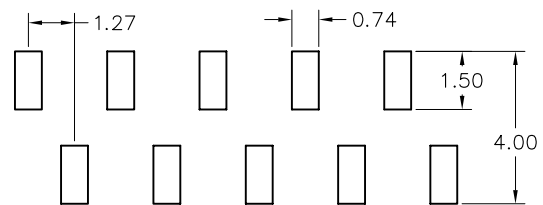

B TYPE

Recommended PCB Layout

Ordering Information

FCM1211	-	XX	XX	A	XX	B	1	A	X
Plastics Height 21:2.1mm 34:3.4mm 43:4.3mm	No. of Pins Per Row 02~50	Contact Plating 01:Gold Flash 02:Gold 2μ'' 03:Gold 3μ'' 04: Tin Duplex Plating 06:Gold Flash/Tin(100μ'')	Serial Number	Material Type A:PBT B:NYLON 6T C:LCP D:NYLON 9T	Options A:BAG B:TRAY C:TUBE D:TAPE REEL				