
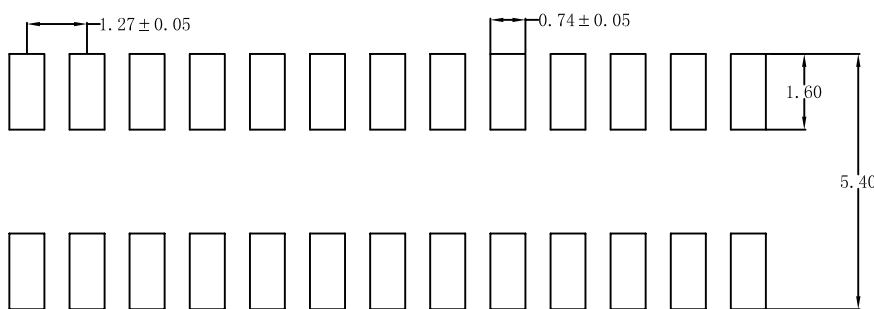
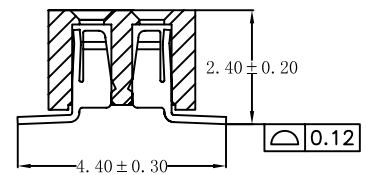
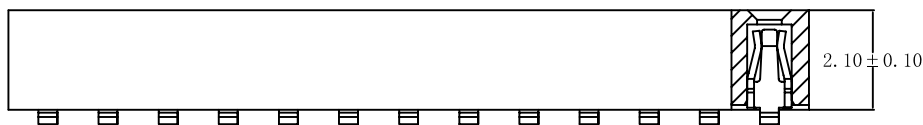


1. 27mm(0.050") Female Header, Dual Row, SMT Type H=2.10mm

SPECIFICATIONS

Current Rating : 1AMP
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : 500V AC/minute
 Operation Temperature: -40° C to +105° C
 Contact Material : Phosphor Bronze
 Contact plating : Gold Flash Plated
 Insulator Material : High Temperature Thermoplastic (UL94V-0)
 Standard: PA6T+30%G.F

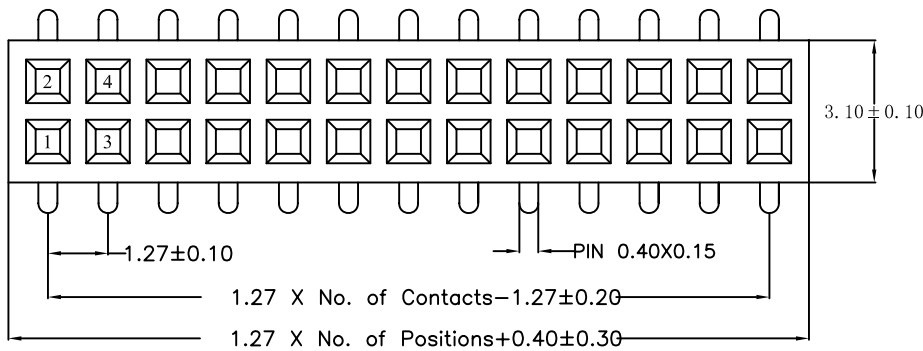

Ordering Information

FCM2211	-	XX	XX	A	XX	B 1 A	X
Plastics Height		No. of Pins Per Row	Contact Plating		Serial Number	Material Type	Options
21:2.1mm 34:3.4mm 43:4.3mm		02~50	01:Gold Flash 02:Gold 2μ'' 03:Gold 3μ'' 04: Tin Duplex Plating 06:Gold Flash/Tin(100μ'')			A:PBT B:NYLON 6T C:LCP D:NYLON 9T	A:BAG B:TRAY C:TUBE D:TAPE REEL