





1.27*1.27mm(0.050"*0.050")Female Header, Dual Row, SMT Type H=3.40mm

SPECIFICATIONS

Current Rating : 1AMP
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : 500V AC/minute
 Operation Temperature: -40° C to +105° C
 Contact Material : Phosphor Bronze
 Contact plating : Gold Flash Plated
 Insulator Material : High Temperature Thermoplastic (UL94V-0)
 Standard: PA6T+30%G.F

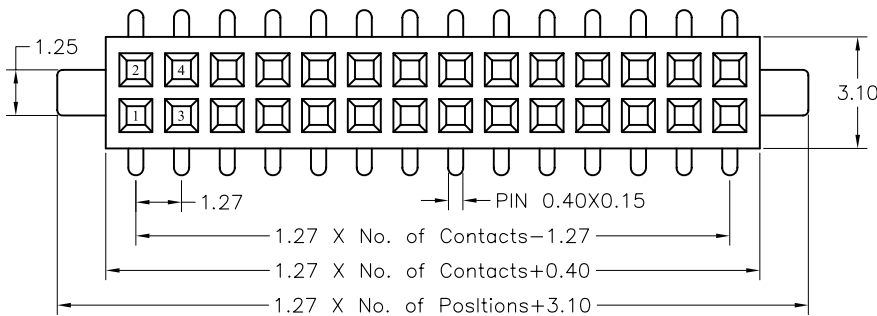

H	3.4	4.3
---	-----	-----

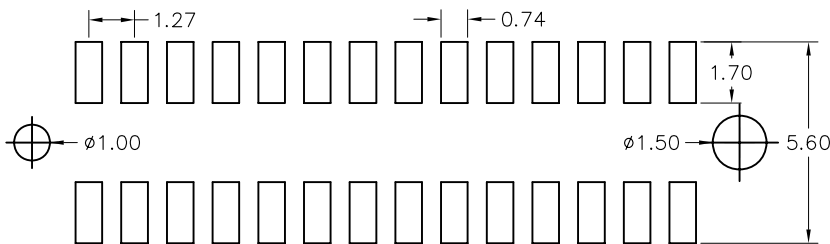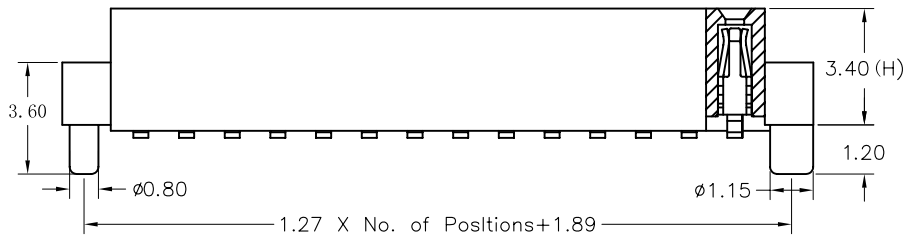

Recommended PCB Layout

Ordering Information

PCM2341	- XX	XX	B	XX	B 1 A	X
Plastics Height 34: 3.4mm 43: 4.3mm	No. of Pins Per Row 02~50	Contact Plating 01: Gold Flash 02: Gold 2μ'' 03: Gold 3μ'' 04: Tin Duplex Plating 06: Gold Flash/Tin(100μ'')	Serial Number	Material Type A: PBT B: NYLON 6T C: LCP D: NYLON 9T	Options A: BAG B: TRAY C: TUBE D: TAPE REEL	