
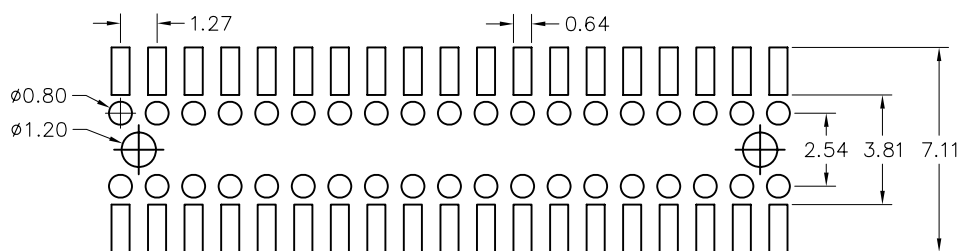

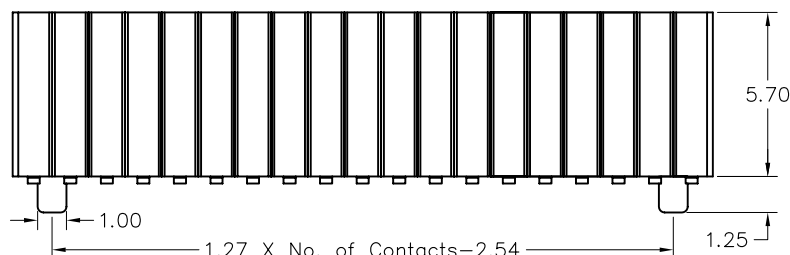



1.27\*1.27mm(0.050"\*0.050")Female Header, Dual Row, SMT Type H=5.70mm

## SPECIFICATIONS

Current Rating : 1AMP  
 Contact Resistance : 20mΩ Max.  
 Insulation Resistance: 1000MΩ Min.  
 Withstanding Voltage : 500V AC/minute  
 Operation Temperature: -40° C to +105° C  
 Contact Material : Phosphor Bronze  
 Contact plating : Gold Flash Plated  
 Insulator Material : High Temperature Thermoplastic (UL94V-0)  
 Standard: PA6T+30%G.F

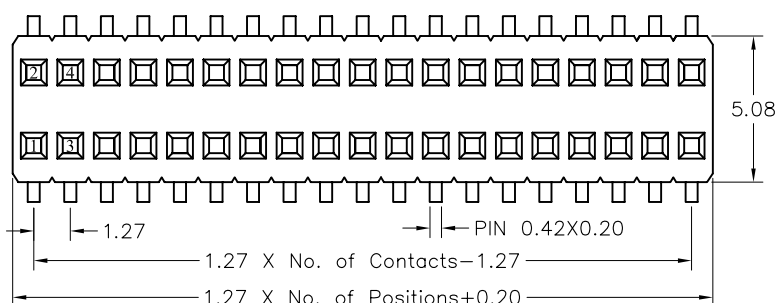

Recommended PCB Layout

## Ordering Information

FDM2571	-	XX	XX	A	XX	B 1 A	X
		No. of Pins Per Row 02~50	Contact Plating 01:Gold Flash 02:Gold 2μ'' 03:Gold 3μ'' 04: Tin Duplex Plating 06:Gold Flash/Tin(100μ'')		Serial Number	Material Type A:PBT B:NYLON 6T C:LCP D:NYLON 9T	Options A:BAG B:TRAY C:TUBE D:TAPE REEL