
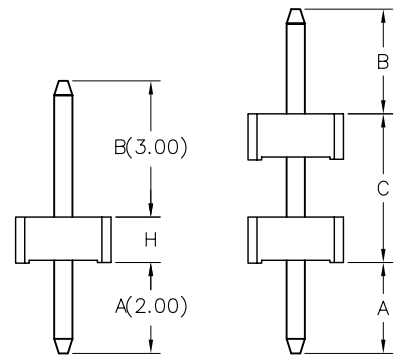
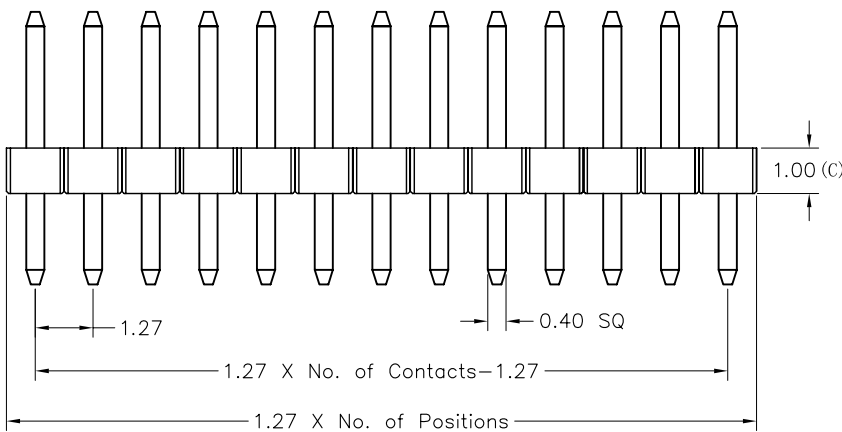



1.27mm (0.050") Pin Header, Single Row, Straight Type H=1.00mm


SPECIFICATIONS

Current Rating : 1AMP
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : 500V AC/minute
 Operation Temperature: -40° C to +105° C
 Contact Material : Brass
 Contact plating : Gold Flash Plated
 Insulator Material : High Temperature Thermoplastic (UL94V-0)
 Standard: PA6T+30%G.F

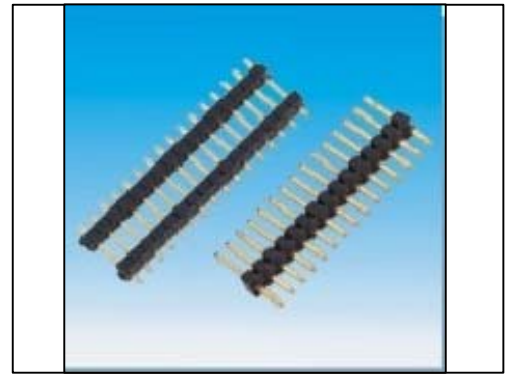

PCS1101 Series PCS1102 Series

H	1.0	1.5	1.7	2.0	2.5
W	2.0	2.0	2.5	2.5	2.5



Recommended PCB Layout

Pin Length = A+B+1.00(C)

Ordering Information

PCS1101 /PCS1102	- XX	XX	A	XX	B 1 B	X
Plastics Height 10: 1.0mm 15: 1.5mm 17: 1.7mm 20: 2.0mm 25: 2.5mm	No. of Pins Per Row 01~50	Contact Plating 01: Gold Flash 02: Gold 2μ'' 03: Gold 3μ'' 04: Tin Duplex Plating 06: Gold Flash/Tin(100μ'')		Serial Number	Material Type B: NYLON 6T C: LCP D: NYLON 9T	Options A: BAG B: TRAY C: TUBE D: TAPE REEL