
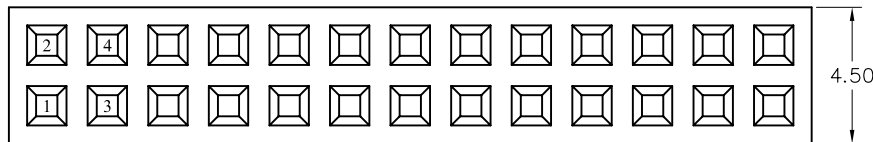




2.00mm(0.079")Female Header, Single/Dual Row, Straight Type H=4.00mm

SPECIFICATIONS


Current Rating : 1.5AMP
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : 500V AC/minute
 Operation Temperature: -40° C to +105° C
 Contact Material : Phosphor Bronze
 Contact plating : Gold Flash Plated
 Insulator Material : High Temperature Thermoplastic (UL94V-0)
 Standard: PA46+30%G.F



H	4.0	4.3	4.6
---	-----	-----	-----

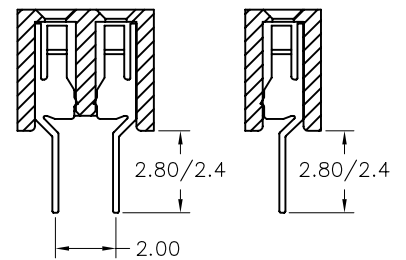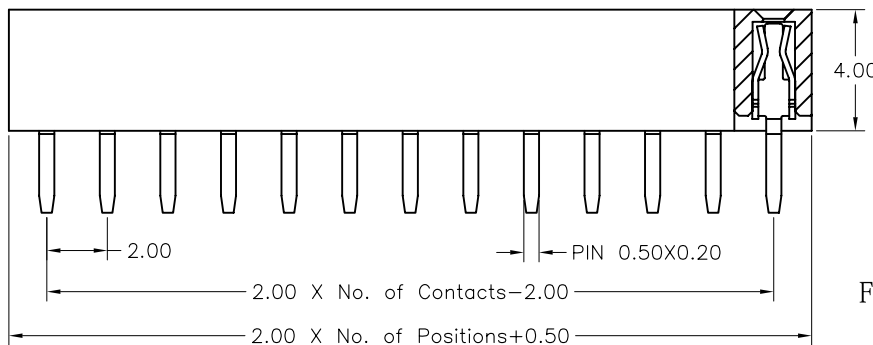

FBS2401 Series FBS1401 Series

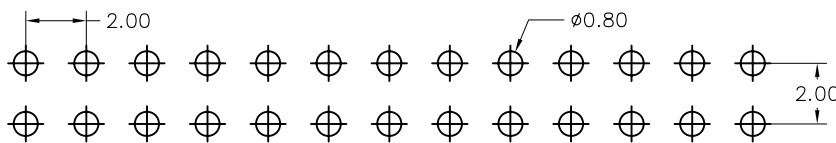

Recommended PCB Layout

Ordering Information

FBS1401
/FBS2401

Plastics Height
 40: 4.0mm
 43: 4.3mm
 46: 4.6mm

XX
 No. of Pins Per Row
 02~40

XX A
 Contact Plating
 01: Gold Flash
 02: Gold 2μ''
 03: Gold 3μ''
 04: Tin
 Duplex Plating
 06: Gold Flash/Tin(100μ'')

XX
 Serial Number

F 1 A
 Material Type
 A: PBT
 B: NYLON 6T
 C: LCP
 D: NYLON 9T
 E: NYLON 66
 F: NYLON 46

X
 Options
 A: BAG
 B: TRAY
 C: TUBE
 D: TAPE REEL