

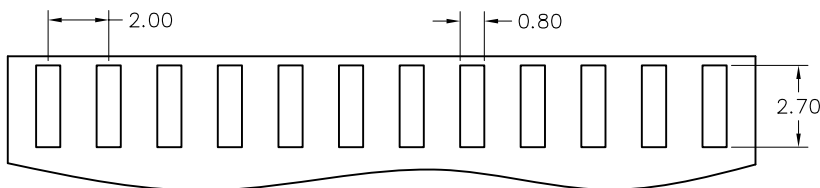

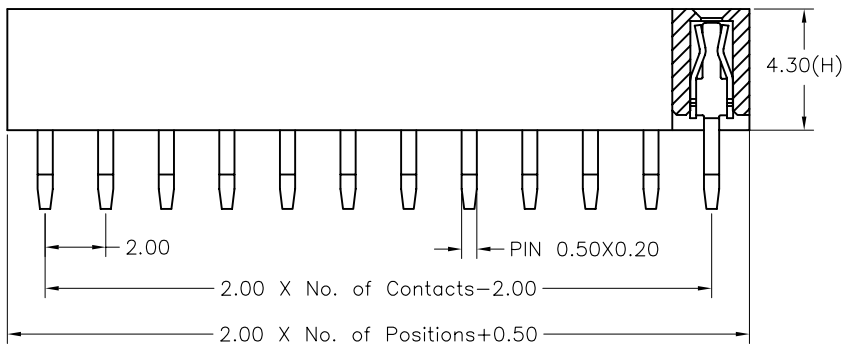



2.00*2.00mm(0.079"*0.079")Female Header, Dual Row, Straddle Type H=4.30mm

SPECIFICATIONS

Current Rating : 1.5AMP
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : 500V AC/minute
 Operation Temperature: -40° C to +105° C
 Contact Material : Phosphor Bronze
 Contact plating : Gold Flash Plated
 Insulator Material : High Temperature Thermoplastic (UL94V-0)
 Standard: PA46+30%G.F

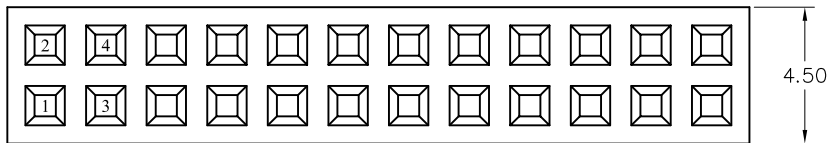

Recommended PCB Layout

Ordering Information

FBC2401	- XX	XX	A	XX	F 1 A	X
Plastics Height 40: 4.0mm 43: 4.3mm 46: 4.6mm	No. of Pins Per Row 01~40	Contact Plating 01: Gold Flash 02: Gold 2μ'' 03: Gold 3μ'' 04: Tin Duplex Plating 06: Gold Flash/Tin(100μ'')		Serial Number	Material Type A: PBT B: NYLON 6T C: LCP D: NYLON 9T E: NYLON 66 F: NYLON 46	Options A: BAG B: TRAY C: TUBE D: TAPE REEL