
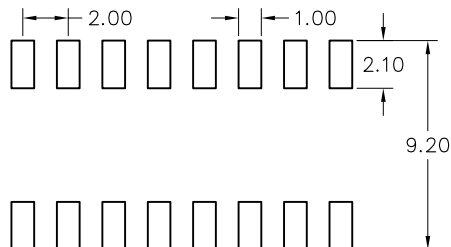



2.00*2.00mm (0.079"*0.079") Female Header, Dual Row, SMT Type H=5.20mm

SPECIFICATIONS

Current Rating : 1.5AMP
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : 500V AC/minute
 Operation Temperature: -40° C to +105° C
 Contact Material : Phosphor Bronze
 Contact plating : Gold Flash Plated
 Insulator Material : High Temperature Thermoplastic (UL94V-0)
 Standard: PA6T+30%G.F

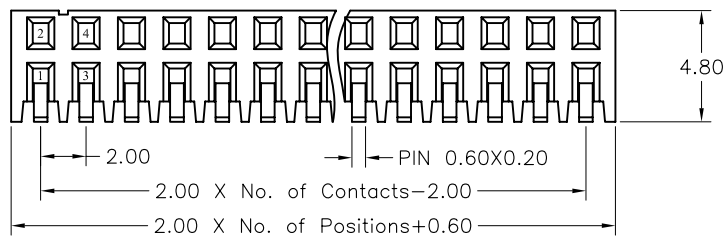

Recommended PCB Layout

Ordering Information

FBM2521	-	XX	XX	A	XX	B	1	A	X
		No. of Pins Per Row 02~40		Contact Plating 01:Gold Flash 02:Gold 2μ'' 03:Gold 3μ'' 04: Tin Duplex Plating 06:Gold Flash/Tin(100μ'')		Serial Number		Material Type A:PBT B:NYLON 6T C:LCP D:NYLON 9T E:NYLON 66 F:NYLON 46	
									Options A:BAG B:TRAY C:TUBE D:TAPE REEL