
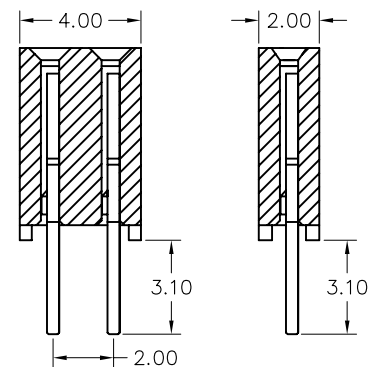
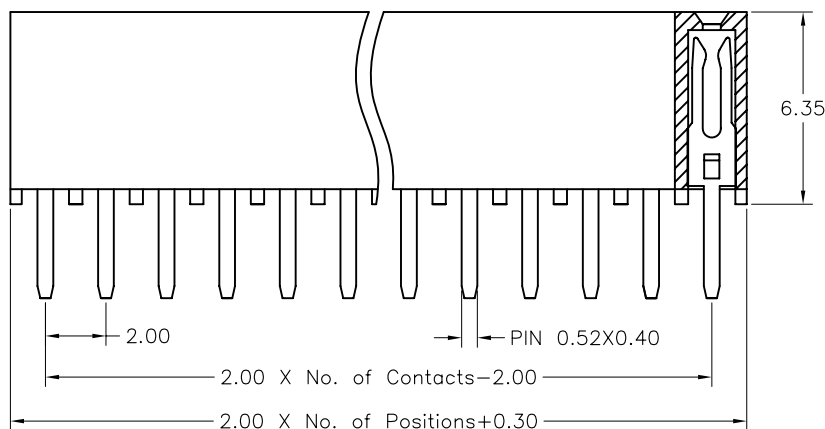



2.00mm(0.079")Female Header, Single/Dual/Quad Row, Straight Type H=6.35mm

SPECIFICATIONS


Current Rating : 1.5AMP
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : 500V AC/minute
 Operation Temperature: -40° C to +105° C
 Contact Material : Phosphor Bronze
 Contact plating : Gold Flash Plated
 Insulator Material : High Temperature Thermoplastic (UL94V-0)
 Standard: PA66+30%G.F

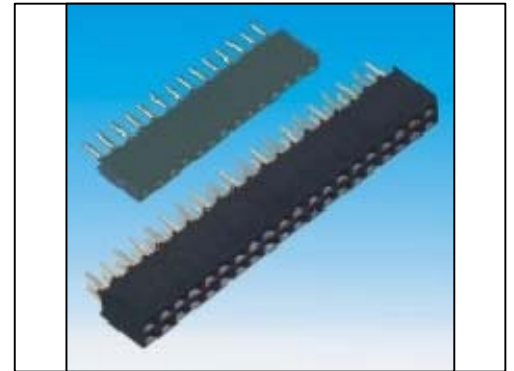

FBS2631 Series FBS1631 Series

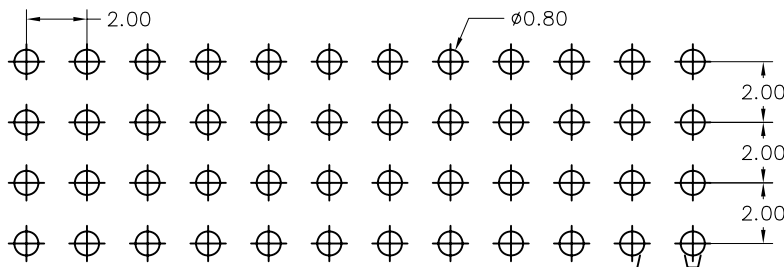

Recommended PCB Layout

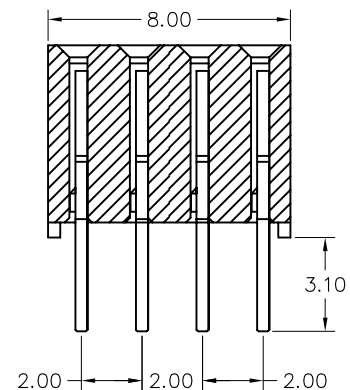

FBS4631 Series

Ordering Information

FBS1631

/FBS2631

/FBS4631

XX	XX	A	XX	E 1 A	X
No. of Pins Per Row 02~40	Contact Plating 01:Gold Flash 02:Gold 2μ'' 03:Gold 3μ'' 04: Tin Duplex Plating 06:Gold Flash/Tin(100μ'')	Serial Number	Material Type A:PBT B:NYLON 6T C:LCP D:NYLON 9T E:NYLON 66	Options A:BAG B:TRAY C:TUBE D:TAPE REEL	