
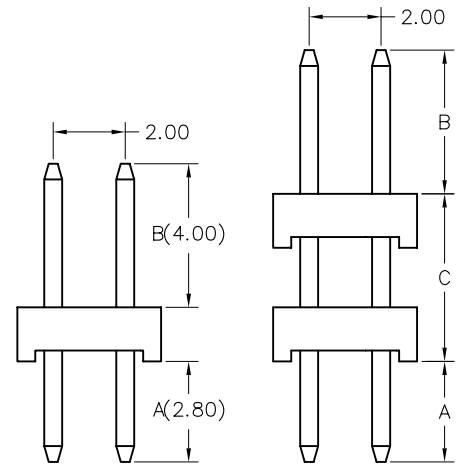



2.00*2.00mm (0.079"*0.079") Pin Header, Dual Row, Straight Type H=1.50mm

SPECIFICATIONS

Current Rating : 1.5AMP
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : 500V AC/minute
 Operation Temperature: -40° C to +105° C
 Contact Material : Brass
 Contact plating : Gold Flash Plated
 Insulator Material : High Temperature Thermoplastic (UL94V-0)
 Standard: PBT+30%G. F

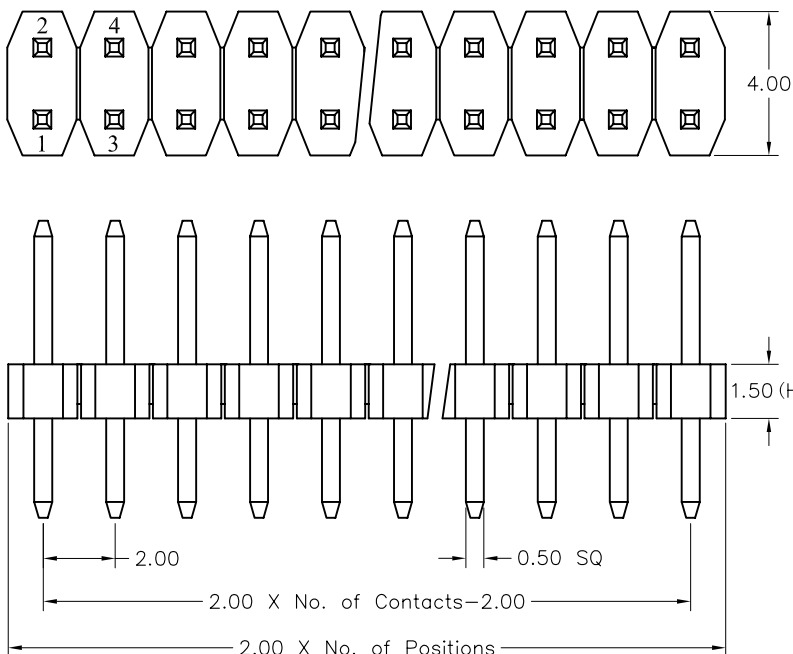

PBS2151 Series PBS2152 Series

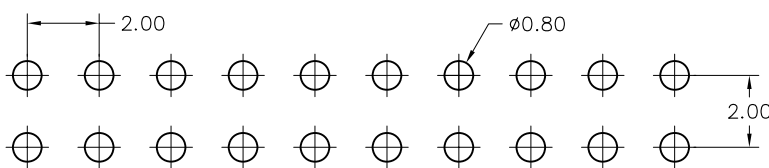

Recommended PCB Layout

H	1.0	1.5	2.0
---	-----	-----	-----

Pin Length = A+B+H(C)

Ordering Information

PBS2151 /PBS2152	- XX	XX	A	XX	A 1 B	X
Plastics Height 10:1.0mm 15:1.5mm 20:2.0mm	No. of Pins Per Row 02~40	Contact Plating 01:Gold Flash 02:Gold 2μ'' 03:Gold 3μ'' 04: Tin Duplex Plating 06:Gold Flash/Tin(100μ''')		Serial Number	Material Type A:PBT B:NYLON 6T C:LCP D:NYLON 9T E:NYLON 66 F:NYLON 46	Options A:BAG B:TRAY C:TUBE D:TAPE REEL