

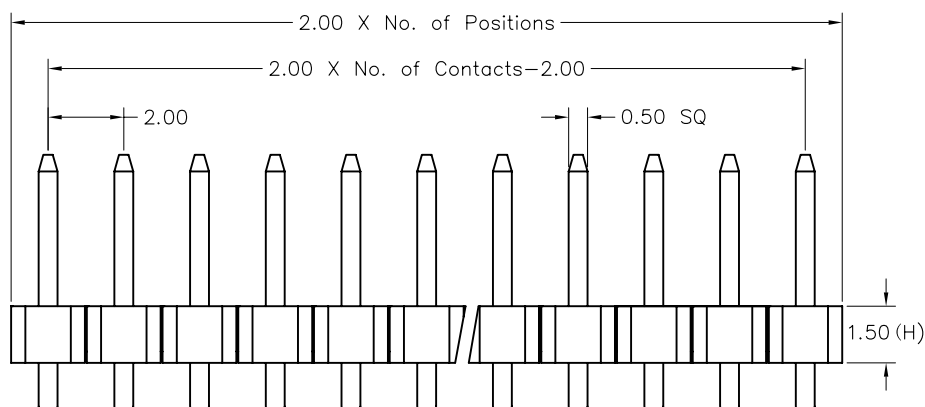



2.00mm (0.079") Pin Header, Single Row, Right Angle Type H=1.50mm

## SPECIFICATIONS

Current Rating : 1.5AMP  
 Contact Resistance : 20mΩ Max.  
 Insulation Resistance: 1000MΩ Min.  
 Withstanding Voltage : 500V AC/minute  
 Operation Temperature: -40° C to +105° C  
 Contact Material : Brass  
 Contact plating : Gold Flash Plated  
 Insulator Material : High Temperature Thermoplastic (UL94V-0)  
 Standard: PBT+30%G. F

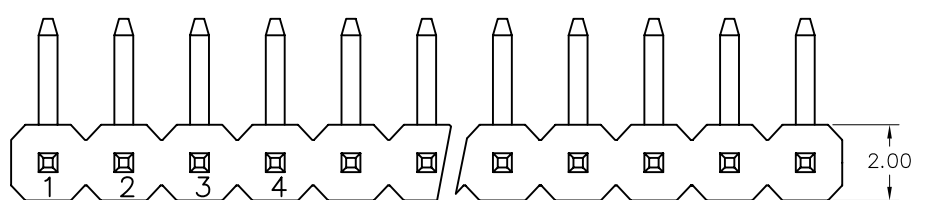

| H | 1.0 | 1.5 | 2.0 |
|---|-----|-----|-----|
|---|-----|-----|-----|

Recommended PCB Layout

Pin Length = A+B+D+H+1.00

## Ordering Information

| PBR1151                                                | - XX                         | XX                                                                                                                             | A | XX            | A 1 B                                                           | X                                                       |
|--------------------------------------------------------|------------------------------|--------------------------------------------------------------------------------------------------------------------------------|---|---------------|-----------------------------------------------------------------|---------------------------------------------------------|
| Plastics Height<br>10: 1.0mm<br>15: 1.5mm<br>20: 2.0mm | No. of Pins Per Row<br>01~40 | Contact Plating<br>01: Gold Flash<br>02: Gold 2μ''<br>03: Gold 3μ''<br>04: Tin<br>Duplex Plating<br>06: Gold Flash/Tin(100μ'') |   | Serial Number | Material Type<br>A: PBT<br>B: NYLON 6T<br>C: LCP<br>D: NYLON 9T | Options<br>A: BAG<br>B: TRAY<br>C: TUBE<br>D: TAPE REEL |