



2.00mm (0.079") Board Spacer, Single Row, SMT Type H=1.50mm

SPECIFICATIONS



Current Rating : 1.5AMP
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : 500V AC/minute
 Operation Temperature: -40° C to +105° C
 Contact Material : Brass
 Contact plating : Gold Flash Plated
 Insulator Material : High Temperature Thermoplastic (UL94V-0)
 Standard: PA6T+30%G.F

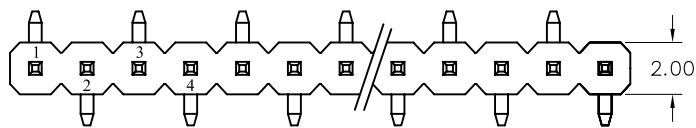

B TYPE

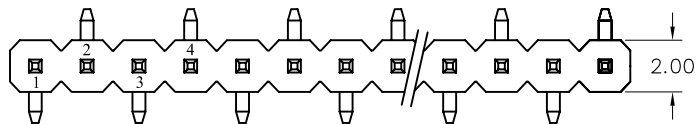


A TYPE

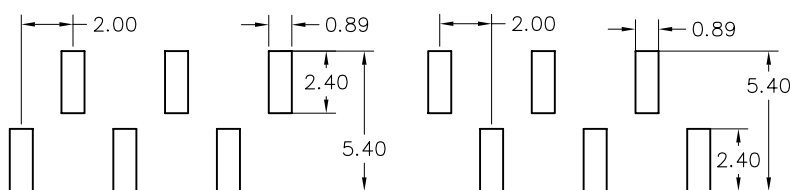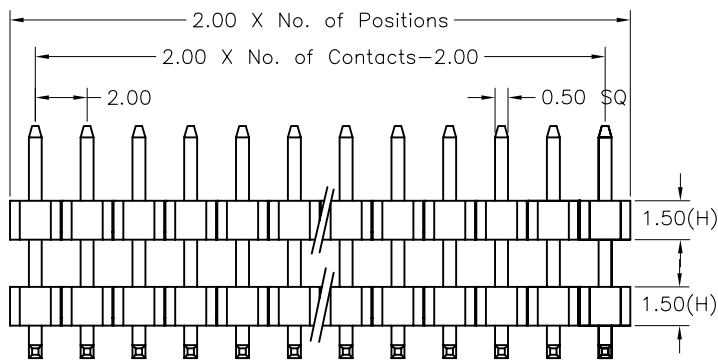

A TYPE

B TYPE

Recommended PCB Layout

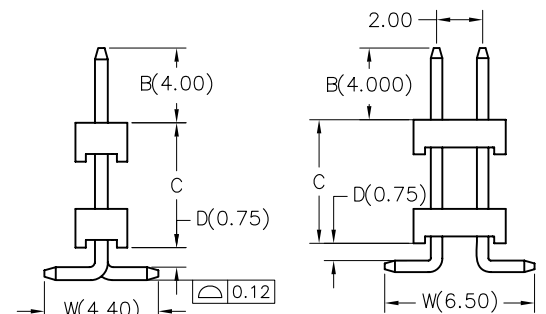

PBM1152 Series

PBM2152 Series

H	1.0	1.5	2.0
---	-----	-----	-----

$$\text{Pin Length} = B + C + D + W/2$$

Ordering Information

PBM1152
/PBM2152

Plastics Height
 10: 1.0mm
 15: 1.5mm
 20: 2.0mm

— XX

No. of Pins Per Row
 02~40

XX A

Contact Plating
 01: Gold Flash
 02: Gold 2μ''
 03: Gold 3μ''
 04: Tin
 Duplex Plating
 06: Gold Flash/Tin(100μ'')

XX

Serial Number

B 1 B

Material Type
 A: PBT
 B: NYLON 6T
 C: LCP
 D: NYLON 9T

X

Options
 A: BAG
 B: TRAY
 C: TUBE
 D: TAPE REEL