
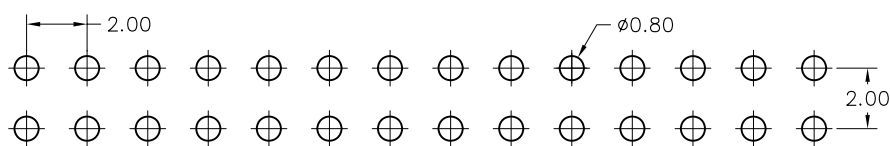
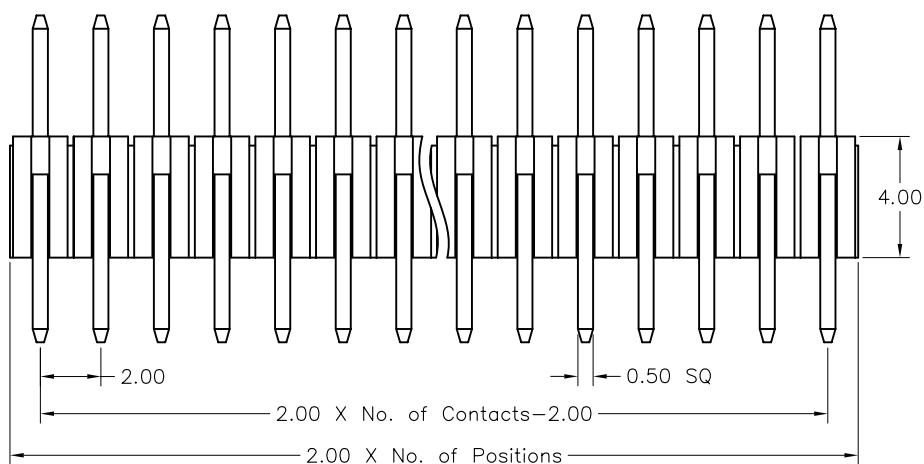


2.00*2.00mm(0.079"*0.079")Pin Header, Dual Row, Straight/Right Angle Type H=4.00mm

SPECIFICATIONS


Current Rating : 1.5AMP
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : 500V AC/minute
 Operation Temperature: -40° C to +105° C
 Contact Material : Brass
 Contact plating : Gold Flash Plated
 Insulator Material : High Temperature
 Thermoplastic (UL94V-0)
 Standard: PA66+30%G.F

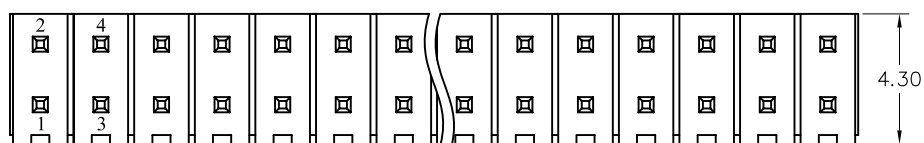


Recommended PCB Layout

$$\text{Pin Length} = A + B + 4.00$$

PBS2401 Series

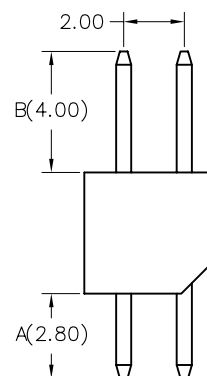

PBR2401 Series



Ordering Information

Ordering Information						
PBS2401 /PBR2401	XX	XX	A	XX	E 1 B	X
						
No. of Pins Per Row 02~40	Contact Plating 01:Gold Flash 02:Gold 2μ'' 03:Gold 3μ'' 04: Tin Duplex Plating 06:Gold Flash/Tin(100μ'')	Serial Number	Material Type A:PBT B:NYLON 6T C:LCP D:NYLON 9T E:NYLON 66 F:NYLON 46	Options A:BAG B:TRAY C:TUBE D:TAPE REEL		