
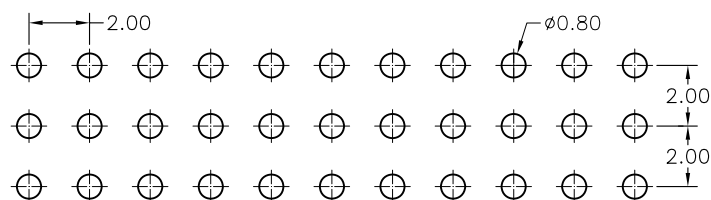
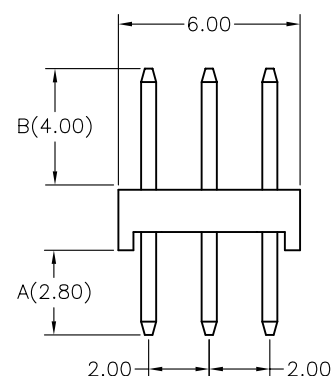


2.00mm(0.079") Pin Header, Triple/Quad Row, Straight Type H=2.00mm

SPECIFICATIONS

Current Rating : 1.5AMP
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : 500V AC/minute
 Operation Temperature: -40° C to +105° C
 Contact Material : Brass
 Contact plating : Gold Flash Plated
 Insulator Material : High Temperature
 Thermoplastic (UL94V-0)
 Standard: PA66+30%G.F

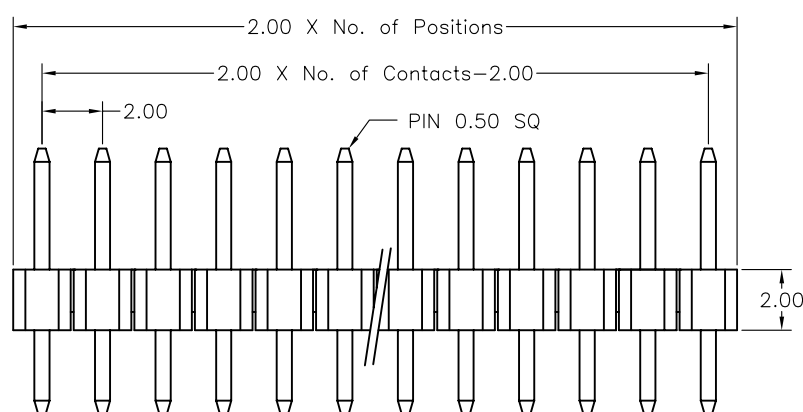

Recommended PCB Layout

Pin Length = A+B+2.00

Ordering Information

PBS3201	-	XX	XX	A	XX	E	1	B	X
		No. of Pins Per Row 01~40		Contact Plating 01:Gold Flash 02:Gold 2μ'' 03:Gold 3μ'' 04: Tin Duplex Plating 06:Gold Flash/Tin(100μ'')		Serial Number		Material Type A:PBT B:NYLON 6T C:LCP D:NYLON 9T E:NYLON 66	
									Options A:BAG B:TRAY C:TUBE D:TAPE REEL