



2.54mm(0.100") Female Header, Single Row, Bottom Entry Type H=5.00mm

SPECIFICATIONS



Current Rating : 3AMP
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : 1000V AC/minute
 Operation Temperature: -40° C to +105° C
 Contact Material : Phosphor Bronze
 Contact plating : Gold Flash Plated
 Insulator Material : High Temperature Thermoplastic (UL94V-0)
 Standard: PA66+30%G.F

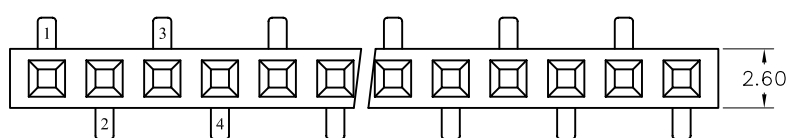


B TYPE

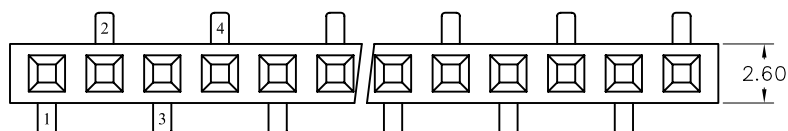


A TYPE

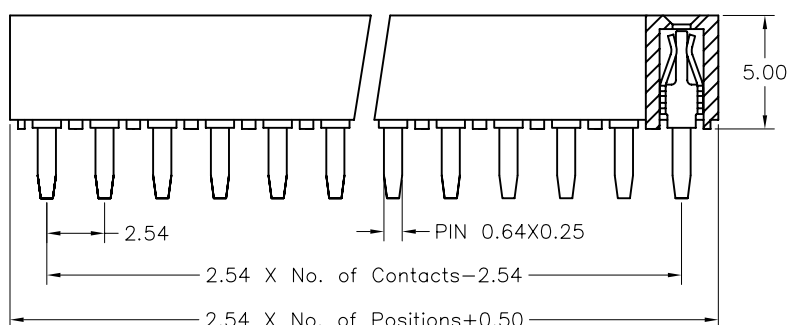


FAF1501 Series

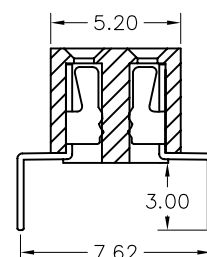


FAF2501 Series

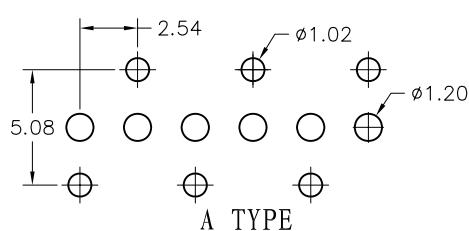

A TYPE

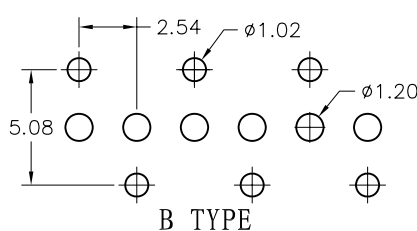

B TYPE

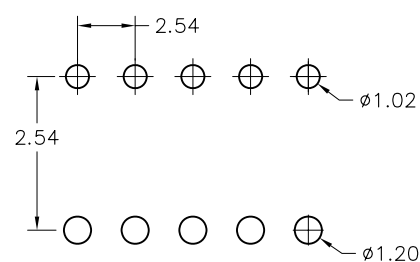

Recommended PCB Layout

Ordering Information

FAF1501
/FAF2501

XX

No. of Pins Per Row
01~40

XX

Contact Plating
 01: Gold Flash
 02: Gold 2μ''
 03: Gold 3μ''
 04: Tin
 Duplex Plating
 06: Gold Flash/Tin(100μ'')

A

XX

Serial Number

E

Material Type
 A: PBT
 B: NYLON 6T
 C: LCP
 D: NYLON 9T
 E: NYLON 66

1

A

X

Options
 A: BAG
 B: TRAY
 C: TUBE
 D: TAPE REEL