

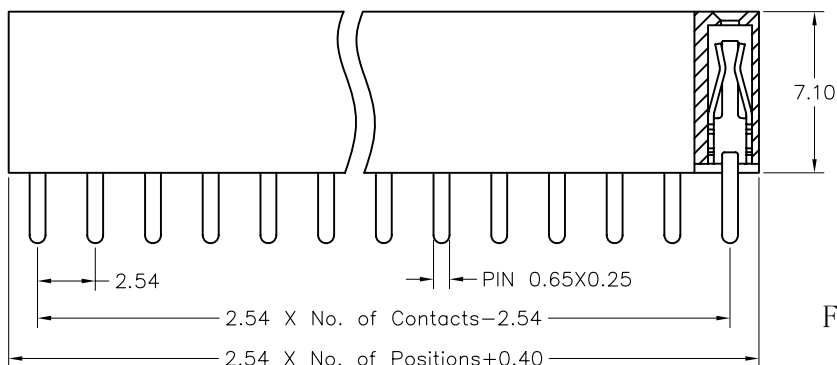
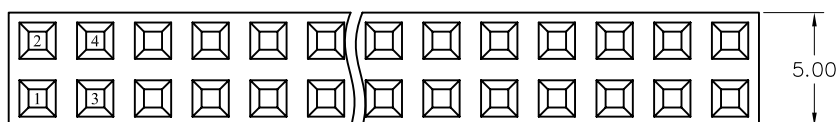



2.54mm(0.100") Female Header, Single/Dual Row, Straight Type H=7.10mm

SPECIFICATIONS

Current Rating : 3AMP
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : 1000V AC/minute
 Operation Temperature: -40° C to +105° C
 Contact Material : Phosphor Bronze
 Contact plating : Gold Flash Plated
 Insulator Material : High Temperature Thermoplastic (UL94V-0)
 Standard: PBT+30%G. F



FAS2711 Series FAS1711 Series

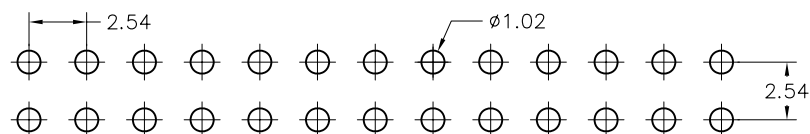

Recommended PCB Layout

Ordering Information

FAS1711 /FAS2711	- XX	XX	A	XX	A 1 A	X
	No. of Pins Per Row 01~40	Contact Plating 01:Gold Flash 02:Gold 2μ'' 03:Gold 3μ'' 04: Tin Duplex Plating 06:Gold Flash/Tin(100μ'')		Serial Number	Material Type A:PBT B:NYLON 6T C:LCP D:NYLON 9T	Options A:BAG B:TRAY C:TUBE D:TAPE REEL