
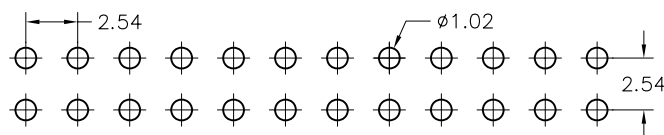
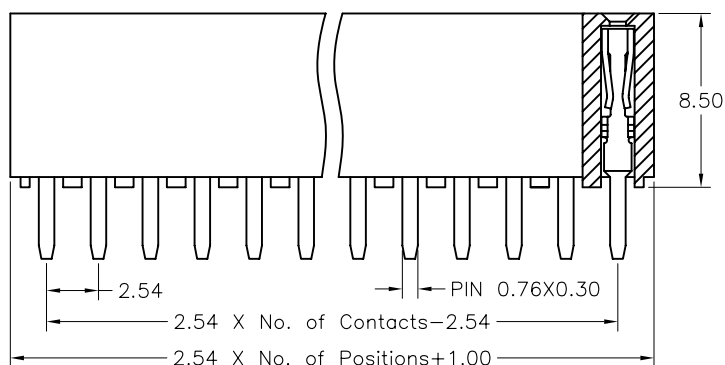



2.54mm(0.100") Female Header, Single/Dual Row, Straight Type H=8.50mm

SPECIFICATIONS

Current Rating : 3AMP
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : 1000V AC/minute
 Operation Temperature: -40° C to +105° C
 Contact Material : Phosphor Bronze
 Contact plating : Gold Flash Plated
 Insulator Material : High Temperature Thermoplastic (UL94V-0)
 Standard: PBT+30%G.F

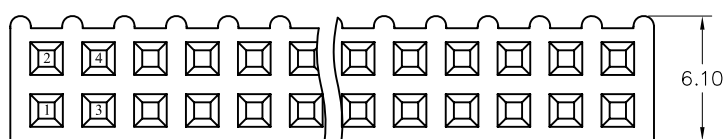


Recommended PCB Layout

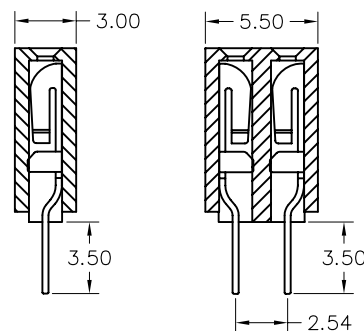

FAS1851 Series

FAS2851 Series

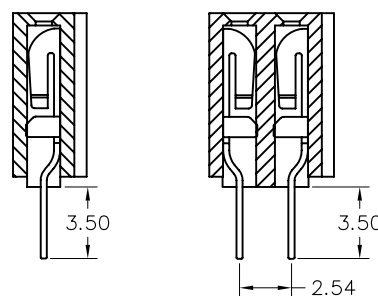

Ordering Information

FAS1851
/FAS2851

XX
└─┘

No. of Pins Per Row
01~40

XX
└─┘

Contact Plating
 01: Gold Flash
 02: Gold 2μ''
 03: Gold 3μ''
 04: Tin
 Duplex Plating
 06: Gold Flash/Tin(100μ'')

A

XX
└─┘

Serial Number

A
└─┘

Material Type
 A: PBT
 B: NYLON 6T
 C: LCP
 D: NYLON 9T

1

A
└─┘

X
└─┘

Options
 A: BAG
 B: TRAY
 C: TUBE
 D: TAPE REEL