



2.54mm (0.100") Pin Header, Single Row, Right Angle Type H=1.50mm

SPECIFICATIONS


Current Rating : 3AMP
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : 1000V AC/minute
 Operation Temperature: -40° C to +105° C
 Contact Material : Brass
 Contact plating : Gold Flash Plated
 Insulator Material : High Temperature Thermoplastic (UL94V-0)
 Standard: PBT+30%G.F

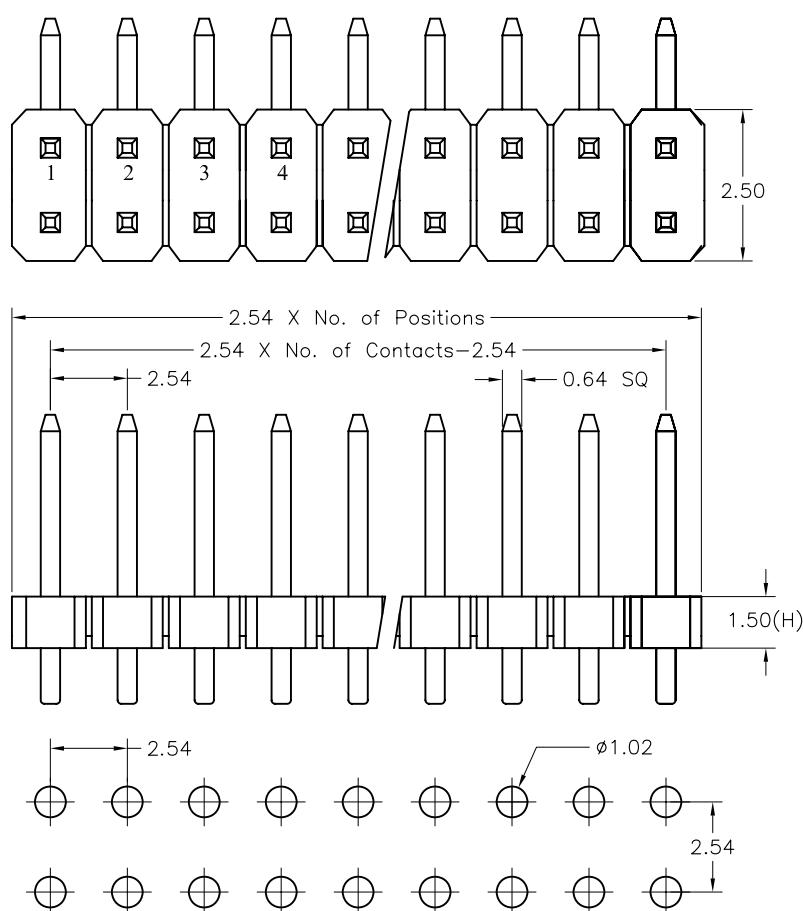

Recommended PCB Layout

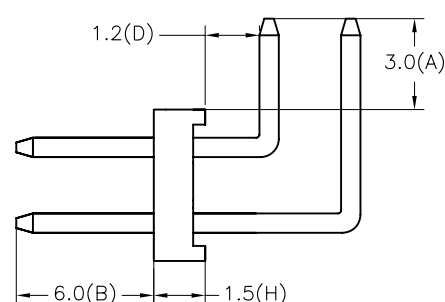

PAR2151 Series

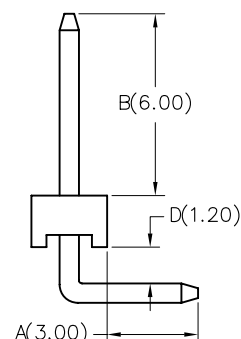

PAR1151 Series

$$\text{Pin Length} = A+B+D+H+1.25$$

$$(A+B+D+H+1.23)$$

Ordering Information

Ordering Information						
PAR1151 /PAR2151	XX	XX	A	XX	A 1 B	X
						
Plastics Height	No. of Pins Per Row	Contact Plating		Serial Number	Material Type	Options
15:1.5mm	01~40	01:Gold Flash			A:PBT	A:BAG
20:2.0mm		02:Gold 2μ''			B:NYLON 6T	B:TRAY
25:2.5mm		03:Gold 3μ''			C:LCP	C:TUBE
		04: Tin			D:NYLON 9T	D:TAPE REEL
		Duplex Plating				
		06:Gold Flash/Tin(100μ'')				