


2.54mm (0.100") Pin Header, Single Row, SMT Type H=1.50mm


SPECIFICATIONS

Current Rating : 3AMP
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : 1000V AC/minute
 Operation Temperature: -40° C to +105° C
 Contact Material : Brass
 Contact plating : Gold Flash Plated
 Insulator Material : High Temperature Thermoplastic (UL94V-0)
 Standard: PA6T+30%G.F


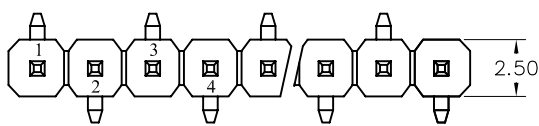


B TYPE


H	1.5	2.0	2.5
---	-----	-----	-----

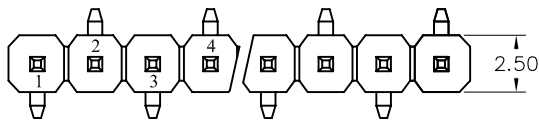


A TYPE

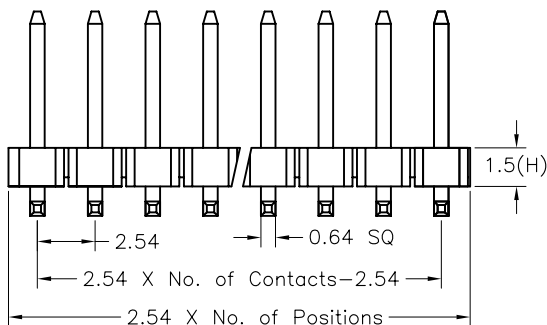


PAM1151 Series



PAM2151 Series

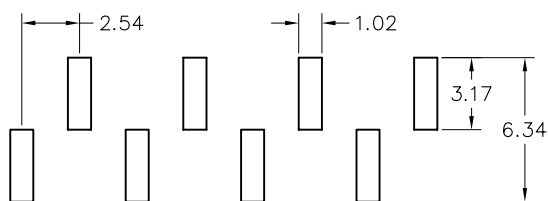

A TYPE

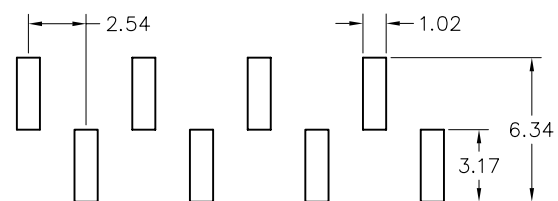

B TYPE

Recommended PCB Layout

Ordering Information

PAM1151 /PAM1151	XX	XX	A	XX	B 1 B	X
Plastics Height 15:1.5mm 20:2.0mm 25:2.5mm	No. of Pins Per Row 02~40	Contact Plating 01:Gold Flash 02:Gold 2μ'' 03:Gold 3μ'' 04: Tin Duplex Plating 06:Gold Flash/Tin(100μ'')		Serial Number	Material Type A:PBT B:NYLON 6T C:LCP D:NYLON 9T	Options A:BAG B:TRAY C:TUBE D:TAPE REEL