





2.00*2.00mm (0.079"*0.079") BOX Header, SMT Type H=5.60mm

SPECIFICATIONS

Current Rating : 1.5AMP
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : 500V AC/minute
 Operation Temperature: -40° C to +105° C
 Contact Material : Brass
 Contact plating : Gold Flash Plated
 Insulator Material : High Temperature
 Thermoplastic (UL94V-0)
 Standard: PA6T+30%G.F

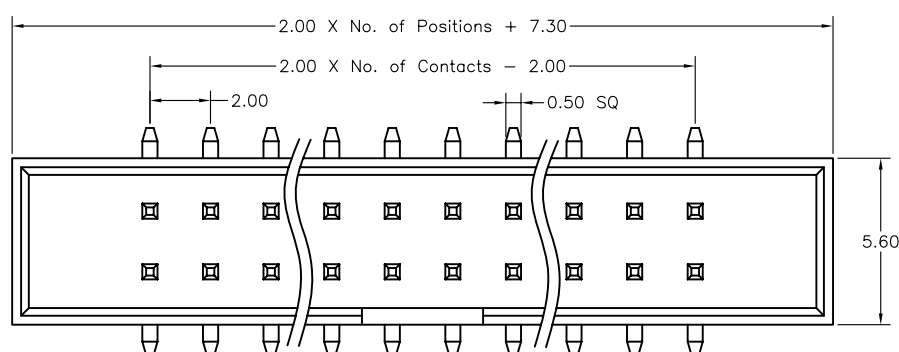

BBM2561 Series

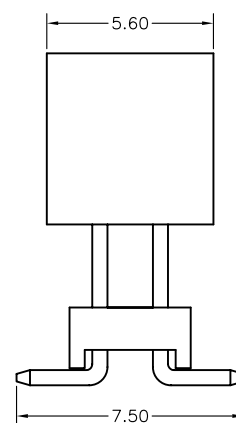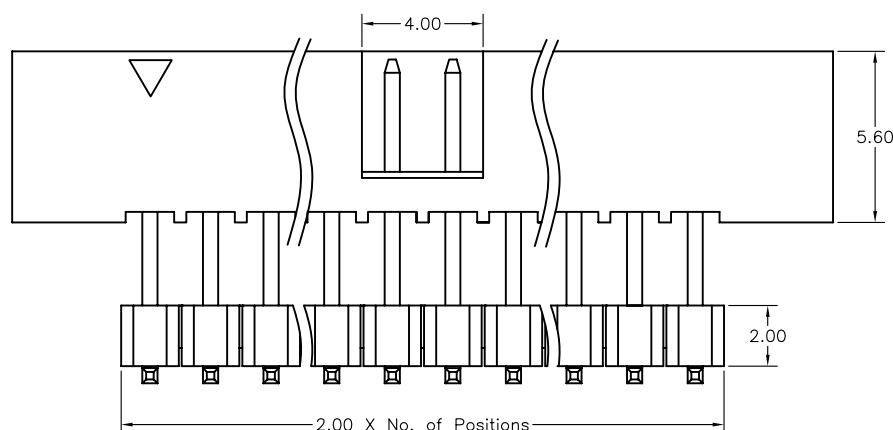

BBM2562 Series

Ordering Information

BBM2562
/BBM2562

- XX
└─┘

No. of total Pins
04~80

XX
└─┘

Contact Plating
 01: Gold Flash
 02: Gold 2μ''
 03: Gold 3μ''
 04: Tin
 Duplex Plating
 06: Gold Flash/Tin (100μ'')

A

XX
└─┘

Serial Number

B 1 B
└─┘

Material Type
 A: PBT
 B: NYLON 6T
 C: LCP
 D: NYLON 9T

X
└─┘

Options
 A: BAG
 B: TRAY
 C: TUBE
 D: TAPE REEL