


2.00*2.00mm (0.079"*0.079") Ejector Header, Straight/Right Type


SPECIFICATIONS

Current Rating : 1.5AMP
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : 500V AC/minute
 Operation Temperature: -40° C to +105° C
 Contact Material : Brass
 Contact plating : Gold Flash Plated
 Insulator Material : High Temperature
 Thermoplastic (UL94V-0)
 Standard: PA66+30%G.F

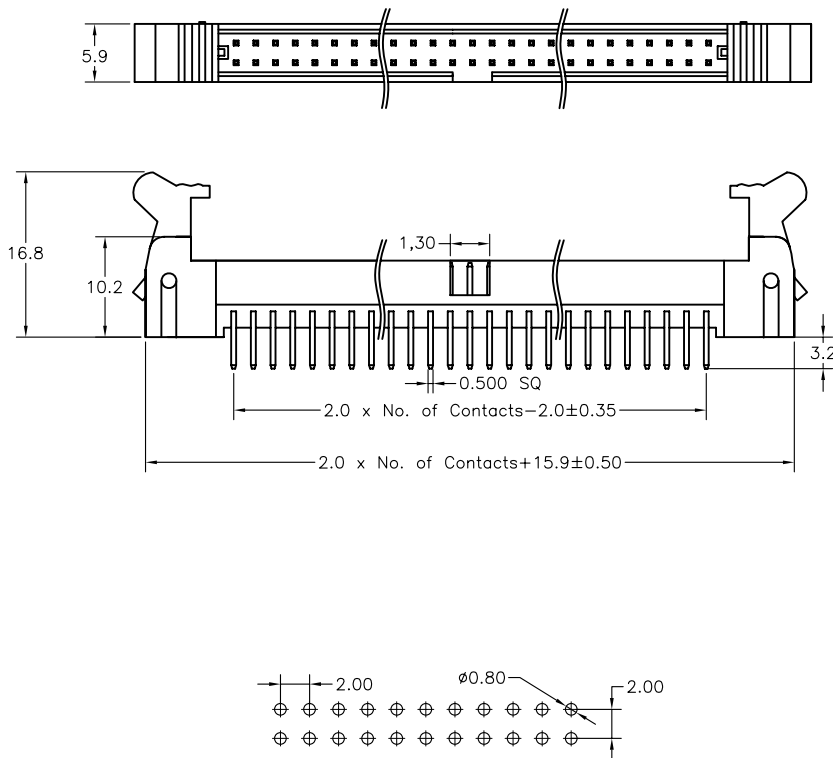

Recommended PCB Layout

EBS1021 Series

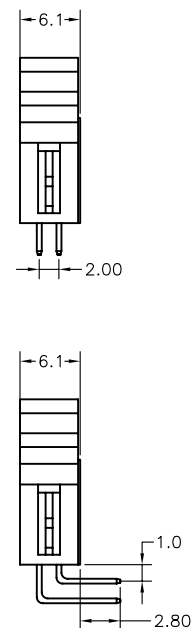

EBR1021 Series

Ordering Information

EBS1021 /EBR1021	- XX	XX	A	XX	E 1 B	X
	No. of total Pins 10~80	Contact Plating 01:Gold Flash 02:Gold 2μ'' 03:Gold 3μ'' 04: Tin Duplex Plating 06:Gold Flash/Tin(100μ'')		Serial Number	Material Type A:PBT B:NYLON 6T C:LCP D:NYLON 9T E:NYLON 66	Options A:BAG B:TRAY C:TUBE D:TAPE REEL