


2.54mm(0.100") Board Spacer, Single Row, SMT Type H=1.50mm


## SPECIFICATIONS

Current Rating : 3AMP  
 Contact Resistance : 20mΩ Max.  
 Insulation Resistance: 1000MΩ Min.  
 Withstanding Voltage : 1000V AC/minute  
 Operation Temperature: -40° C to +105° C  
 Contact Material : Brass  
 Contact plating : Gold Flash Plated  
 Insulator Material : High Temperature Thermoplastic (UL94V-0)  
 Standard: PA6T+30%G.F


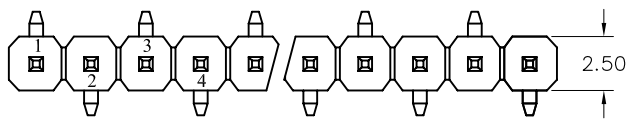


B TYPE


| H | 1.5 | 2.0 | 2.5 |
|---|-----|-----|-----|
|---|-----|-----|-----|




A TYPE

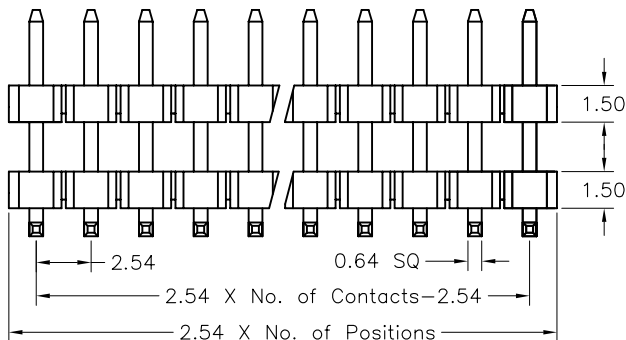


PAM1152 Series



PAM2152 Series

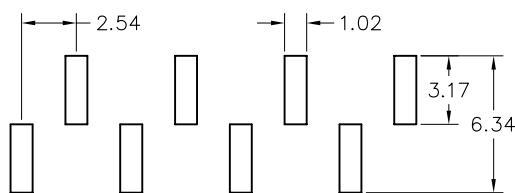

A TYPE

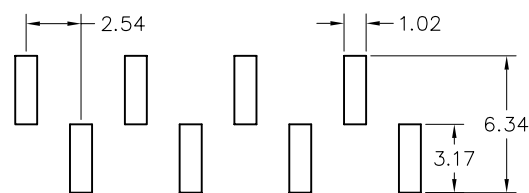

B TYPE

Recommended PCB Layout

$$\text{Pin Length} = B+C+D+W/2(B+C+D+\frac{W-2.54}{2})$$

## Ordering Information

| PAM1152<br>/PAM1152                                 | XX                           | XX                                                                                                                         | A | XX            | B                                                           | 1 | B | X                                                   |
|-----------------------------------------------------|------------------------------|----------------------------------------------------------------------------------------------------------------------------|---|---------------|-------------------------------------------------------------|---|---|-----------------------------------------------------|
| Plastics Height<br>15:1.5mm<br>20:2.0mm<br>25:2.5mm | No. of Pins Per Row<br>02~40 | Contact Plating<br>01:Gold Flash<br>02:Gold 2μ''<br>03:Gold 3μ''<br>04: Tin<br>Duplex Plating<br>06:Gold Flash/Tin(100μ'') |   | Serial Number | Material Type<br>A:PBT<br>B:NYLON 6T<br>C:LCP<br>D:NYLON 9T |   |   | Options<br>A:BAG<br>B:TRAY<br>C:TUBE<br>D:TAPE REEL |