
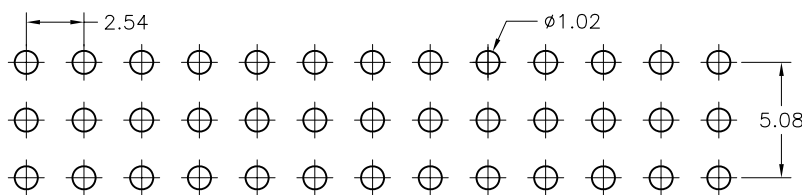
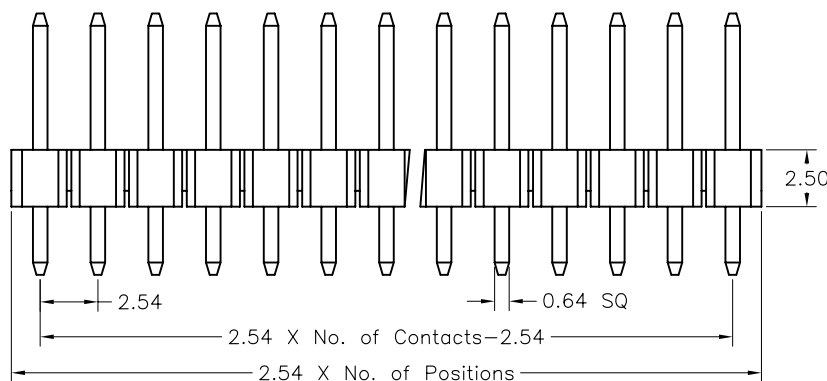
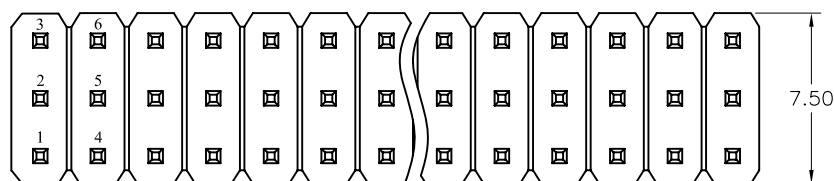


2.54mm(0.100") Pin Header, Triple Row, Straight/Right Angle Type H=2.50mm

SPECIFICATIONS

Current Rating : 3AMP
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : 1000V AC/minute
 Operation Temperature: -40° C to +105° C
 Contact Material : Brass
 Contact plating : Gold Flash Plated
 Insulator Material : High Temperature Thermoplastic (UL94V-0)
 Standard: PBT+30%G.F

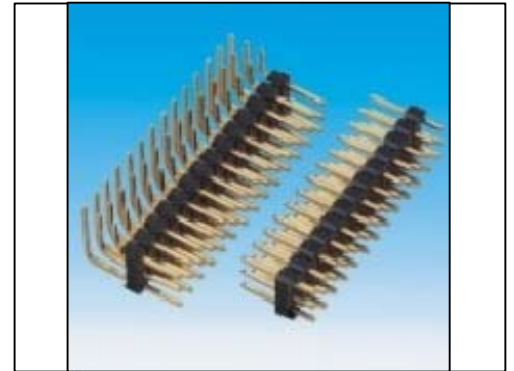


Recommended PCB Layout


$$\text{Pin Length} = A+B+2.50$$

$$(A+B+D+3.70)$$

PAS3251 Series



PAR3251 Series

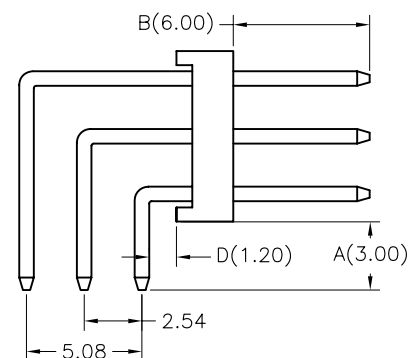

Ordering Information

PAS3251
/PAR3251

XX
└─┘

No. of Pins Per Row
01~40

XX
└─┘

Contact Plating
 01: Gold Flash
 02: Gold 2μ''
 03: Gold 3μ''
 04: Tin
 Duplex Plating
 06: Gold Flash/Tin(100μ'')

A

XX
└─┘

Serial Number

A

1

B

Material Type
 A: PBT
 B: NYLON 6T
 C: LCP
 D: NYLON 9T

X
└─┘

Options
 A: BAG
 B: TRAY
 C: TUBE
 D: TAPE REEL