



2.54mm(0.100") Pin Header, Single/Dual Row, Right Angle SMT Type H=1.50mm

SPECIFICATIONS



Current Rating : 3AMP
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : 1000V AC/minute
 Operation Temperature: -40° C to +105° C
 Contact Material : Brass
 Contact plating : Gold Flash Plated
 Insulator Material : High Temperature Thermoplastic (UL94V-0)
 Standard: PA6T+30%G.F

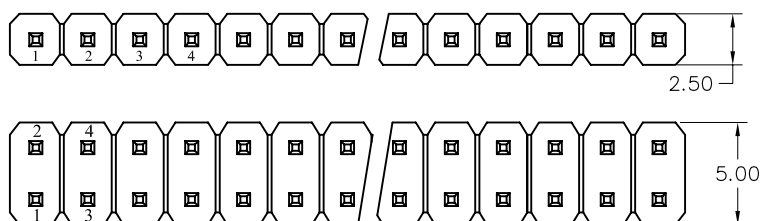

H	1.5	2.0	2.5
---	-----	-----	-----

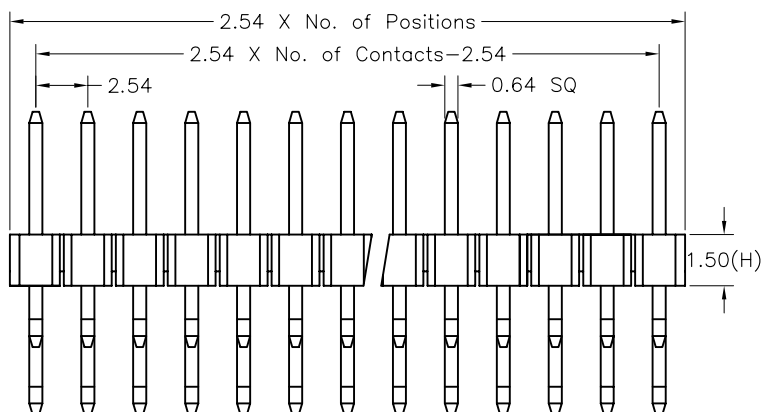

PAZ2251 Series PAZ1251 Series

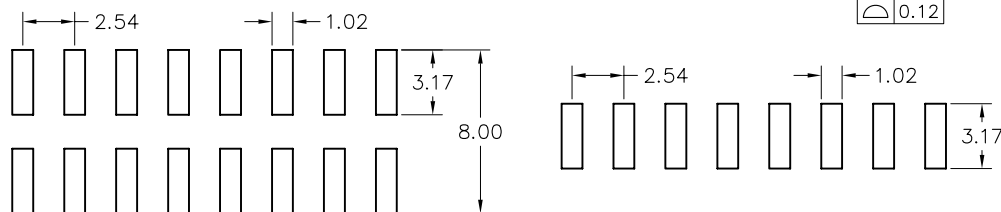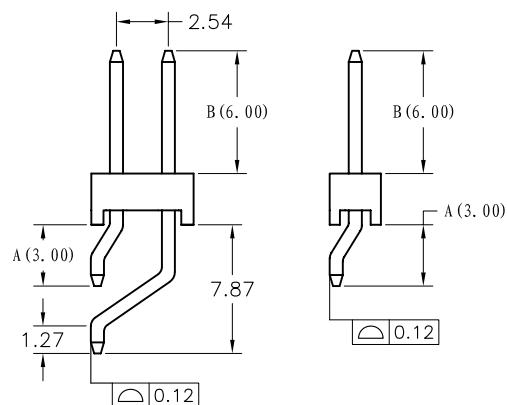

Recommended PCB Layout Pin Length = A+B+H+2.80

Ordering Information

PAZ1251 /PAZ2251	XX	XX	A	XX	B	1	B	X
Plastics Height 15:1.5mm 20:2.0mm 25:2.5mm	No. of Pins Per Row 02~40	Contact Plating 01:Gold Flash 02:Gold 2μ'' 03:Gold 3μ'' 04: Tin Duplex Plating 06:Gold Flash/Tin(100μ'')	Serial Number	Material Type A:PBT B:NYLON 6T C:LCP D:NYLON 9T	Options A:BAG B:TRAY C:TUBE D:TAPE REEL			