
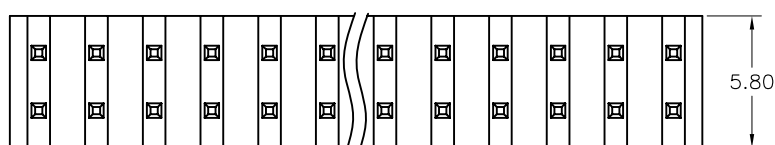




2.54*2.54mm(0.100"*0.100") Pin Header, Dual Row, Straight/Right Angle
Type H=4.30mm

SPECIFICATIONS


Current Rating : 3AMP
Contact Resistance : 20mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage : 1000V AC/minute
Operation Temperature: -40° C to +105° C
Contact Material : Brass
Contact plating : Gold Flash Plated
Insulator Material : High Temperature Thermoplastic (UL94V-0)
Standard: PBT+30%G.F

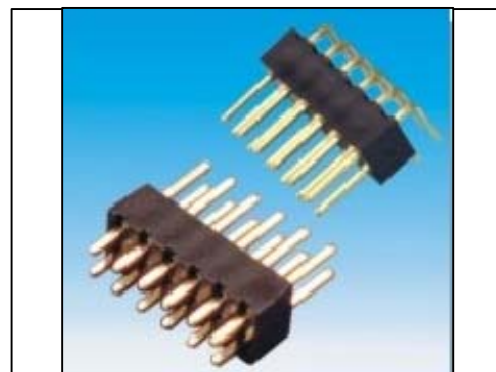


Pin Length = A+B+4.30 (A+B+5.90)

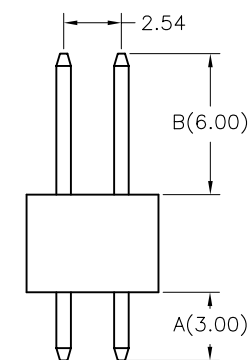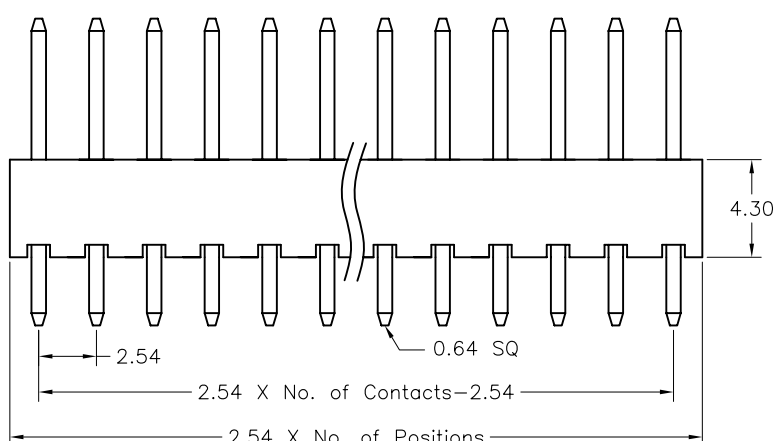

PAS2431 Series

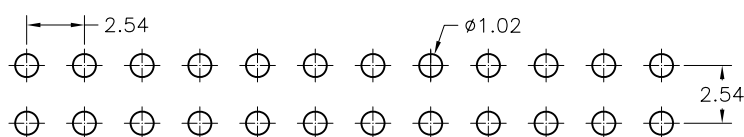

Recommended PCB Layout

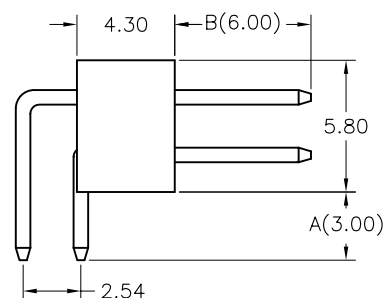

PAR2431 Series

Ordering Information

Ordering Information

PAS2431 /PAR2431	- XX	XX	A	XX	A 1 B	X
No. of Pins Per Row 01~40	Contact Plating 01:Gold Flash 02:Gold 2 μ'' 03:Gold 3 μ'' 04: Tin Duplex Plating 06:Gold Flash/Tin(100 μ'')	Serial Number	Material Type A:PBT B:NYLON 6T C:LCP D:NYLON 9T	Options A:BAG B:TRAY C:TUBE D:TAPE REEL		