
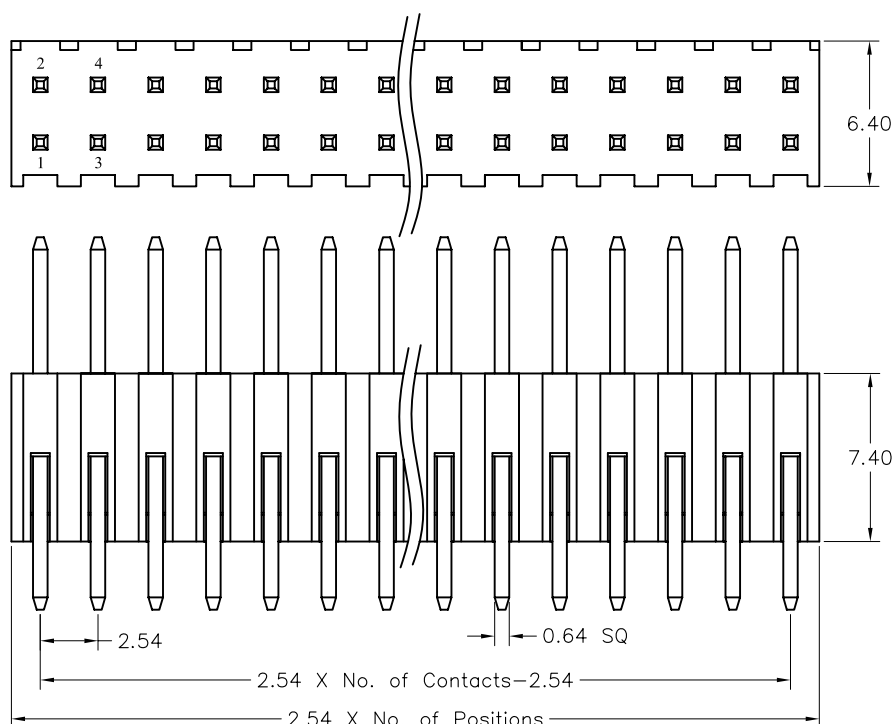


2.54*2.54mm (0.100"*0.100") Pin Header, Dual Row, Straight/Right Angle Type
H=7.40mm


SPECIFICATIONS

Current Rating : 3AMP
Contact Resistance : 20mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage : 1000V AC/minute
Operation Temperature: -40° C to +105° C
Contact Material : Brass
Contact plating : Gold Flash Plated
Insulator Material : High Temperature Thermoplastic (UL94V-0)
Standard: PBT+30%G.F


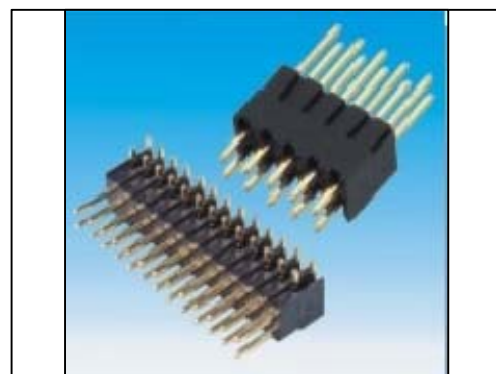


$$\text{Pin Length} = A+B+7.40 (A+B+5.6)$$

PAS274 Series

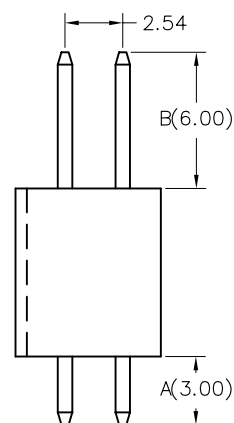

PAR274 Series

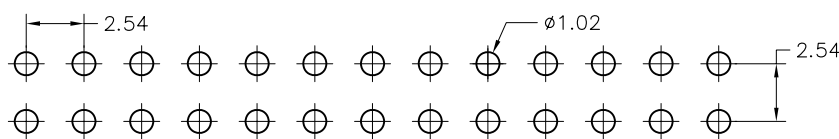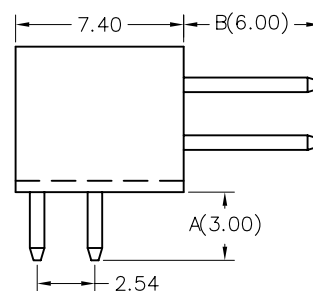

Recommended PCB Layout

Ordering Information

PAS2741 /PAR2741	XX	XX	A	XX	A	1	B	X
No. of Pins Per Row 01~40		Contact Plating 01:Gold Flash 02:Gold 2μ'' 03:Gold 3μ'' 04: Tin Duplex Plating 06:Gold Flash/Tin(100μ'')		Serial Number	Material Type A:PBT B:NYLON 6T C:LCP D:NYLON 9T			Options A:BAG B:TRAY C:TUBE D:TAPE REEL