
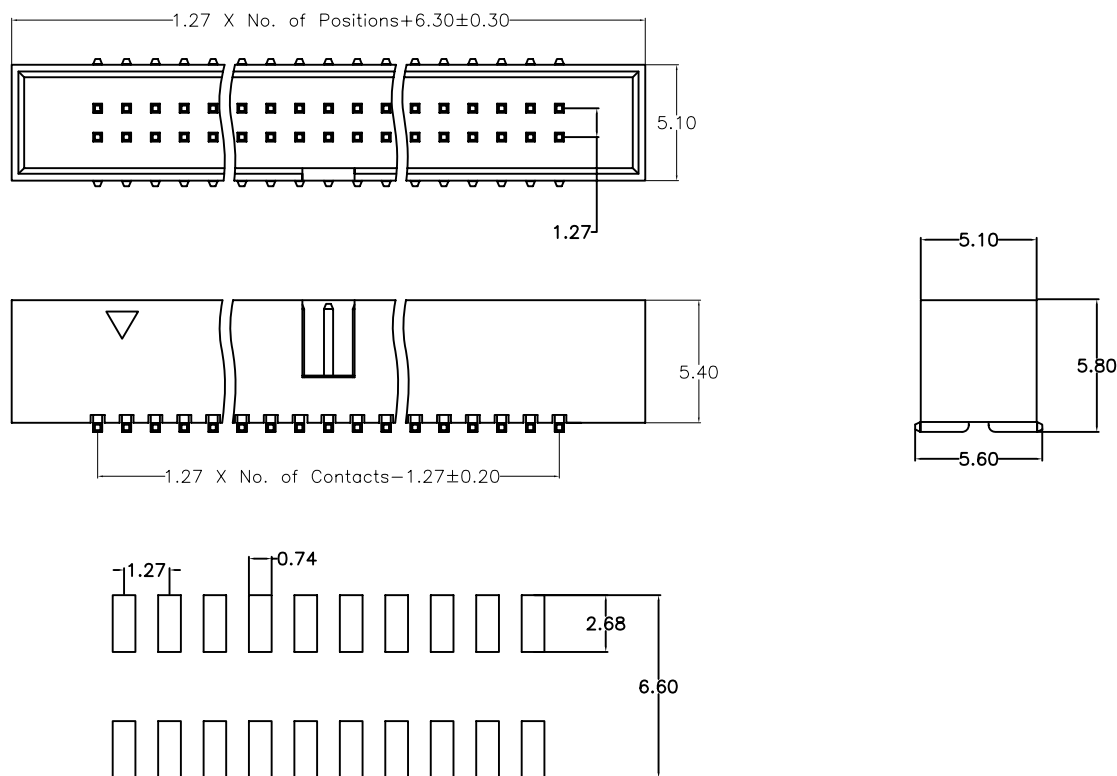


1.27*1.27mm(0.050"*0.050") BOX Header, SMT Type H=5.40mm

SPECIFICATIONS

Current Rating : 1AMP
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : 500V AC/minute
 Operation Temperature: -40° C to +105° C
 Contact Material : Brass
 Contact plating : Gold Flash Plated
 Insulator Material : High Temperature
 Thermoplastic (UL94V-0)
 Standard: PA6T+30%G.F

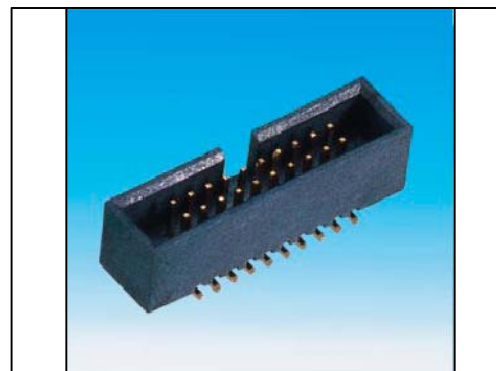

Recommended PCB Layout

Ordering Information

BCM2541	-	XX	XX	A	XX	B	1	B	X	
										
		No. of total Pins 10~60		Contact Plating 01:Gold Flash 02:Gold 2 μ'' 03:Gold 3 μ'' 04: Tin Duplex Plating 06:Gold Flash/Tin(100 μ'')		Serial Number		Material Type A:PBT B:NYLON 6T C:LCP D:NYLON 9T		Options A:BAG B:TRAY C:TUBE D:TAPE REEL