

IC SOCKET PITCH2.54

Materials

Pin(outer sleeve): Brass,machined,CuZn38Pb2

Clip(contac finger): Beryllium copper,heat treated

Plating(outer sleeve):

Tin plated: 2u"m/80u"nickel, 5um/200u" Tin




Gold plated: 2u"/80u" nickel,full gold

Plating clip(contact):

2u"m/80u" nickel,gold or tin plating

Insulator body(black):

Glass filled thermoplastic polyester UL94V-0

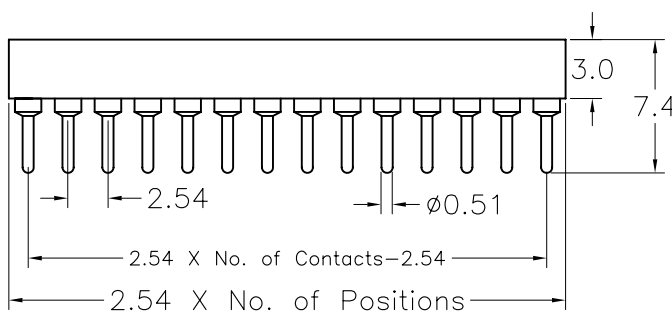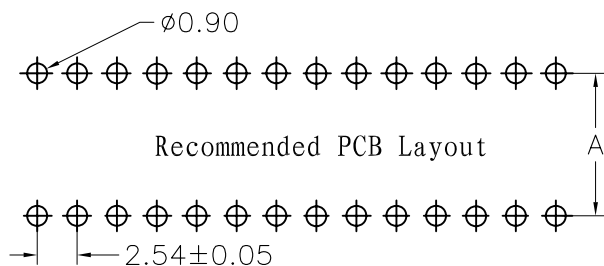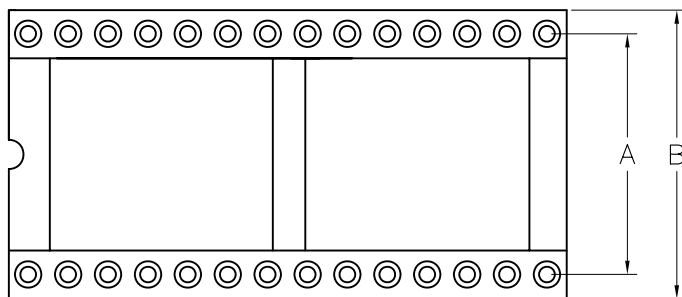

CIRCUITS	A	B	CIRCUITS	A	B
2*3	7.62	10.16	2*16	15.24	17.78
2*4	7.62	10.16	2*18	15.24	17.78
2*5	7.62	10.16	2*20	15.24	17.78
2*7	7.62	10.16	2*21	15.24	17.78
2*8	7.62/10.16	10.16/12.70	2*24	15.24	17.78
2*9	7.62	10.16	2*25	15.24	17.78
2*10	7.62/10.16	10.16/12.70	2*26	15.24	17.78
2*11	10.16	12.70	2*25	22.86	25.40
2*12	7.62/10.16/15.24	10.16/12.70/17.78	2*26	22.86	25.40
2*14	7.62/10.16/15.24	10.16/12.70/17.78	2*32	22.86	25.40

Ordering Information

WIC254	XX	S0	04
Product Series	Total Rows: 06~64	Contact Plating: S0 : Tin Flash S1 : 150u" Tin S2 : 200u" Tin S3 : 300u" Tin	Packing: 1=Bag 2=Tray 3=Tube 4=Reel