


## PITCH 2.54/2.00mm MINI JUMPER


### SPECIFICATIONS

Current Rating: 3AMP/2AMP  
 Contact Resistance: 20mΩ Max  
 Insulation Resistance: 1000MΩ Min  
 Withstand Voltage: 500V AC/minute  
 Operation Temperature: -40℃to+105℃


Contact: Brass  
 plating: Au or Sn Over 50u" Ni  
 Insulator: High Temperature Thermoplastic  
 UL94V-0 Rated  
 Standard: PBT+30%G. F

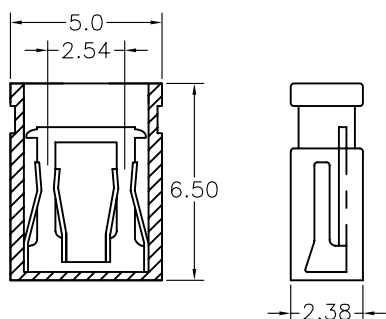


MAS1651 Series

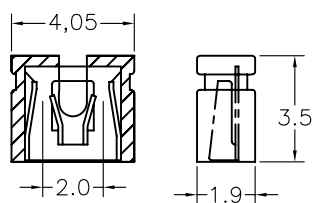


MBS1351 Series

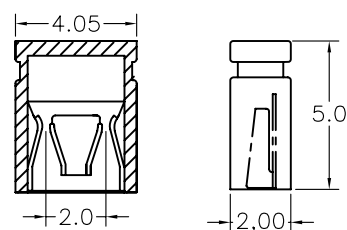

MBS1501 Series

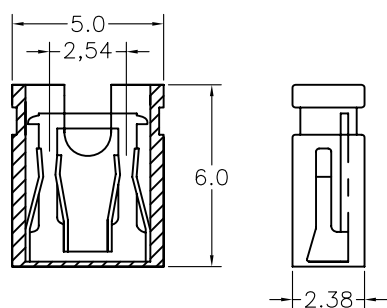

MAS1601 Series

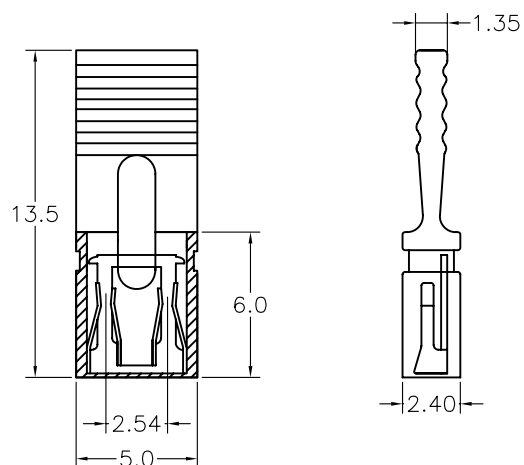

MAS1351 Series

### Ordering Information

|         |             |                                                                            |   |               |
|---------|-------------|----------------------------------------------------------------------------|---|---------------|
| MAS1651 | XX          | XX                                                                         | A | XX            |
| MBS1351 |             |                                                                            |   |               |
| MBS1501 |             |                                                                            |   |               |
| MAS1601 | No. of Pins | Contact Plating                                                            |   | Serial Number |
| MAS1351 | 01 ~ 08     | 01: Gold Flash<br>04: Tin<br>Duplex Plating<br>06: Gold Flash/Tin(100 μ'') |   |               |