


MATERIAL AND FINISH



- *HOUSING PPS (UL 94V-0)
- *CONTACT PHOSPHOR BRONZE TIN PLATING 120 MICRO INCH PERFORMANCE SPECIFICATION
- *CURRENT: 1 AMPERE MAX
- *OPERATING TEMPERATURE: -55 C TO +105 C
- *INSULATION RESISTANCE: 1000 MEGOHMS MIN: INITIAL
- *NORMAL FORCE: 200 GRAMS MIN ON TIN/FIN AND INTERFACE
- *DURABILITY: 40 CYCLES MIN.
- *METAL LATCH: PHOSPHOR BRONZE WITH NICKEL PLATED.

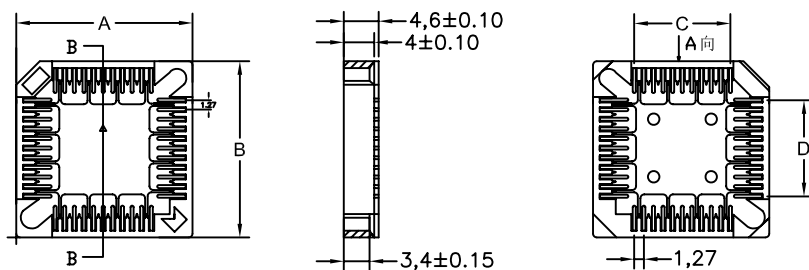

SEC B-B

WPLCC127-A01


LOT NO	SIZE	A±0.2	B±0.2	C±0.2	D±0.2
SMT-20P		15.65	15.65	5.08	5.08
SMT-28P		18.19	18.19	7.62	7.62
SMT-32P		18.15	20.65	7.62	10.16
SMT-44P		23.27	23.27	12.70	12.70
SMT-52P		25.81	25.81	15.24	15.24
SMT-68P		30.89	30.89	20.32	20.32
SMT-84P		35.97	35.97	25.40	25.40

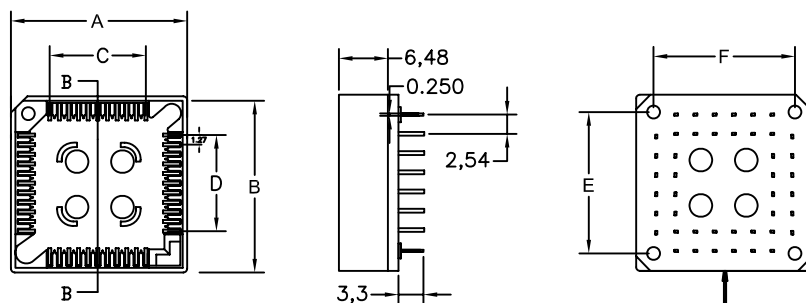

SEC B-B

WPLCC127-A01

LOT NO	S17B	A ± 0.2	B ± 0.2	C ± 0.2	D ± 0.2	E ± 0.2	F ± 0.2
28P		18.19	18.19	7.62	7.62	12.90	12.90
32P		18.15	20.65	7.62	10.16	15.40	12.90
44P		23.27	23.27	12.70	12.70	18.00	18.00
52P		25.81	25.81	15.24	15.24	20.50	20.50
68P		30.89	30.89	20.32	20.32	25.75	25.75
84P		35.97	35.97	25.40	25.40	30.90	30.90

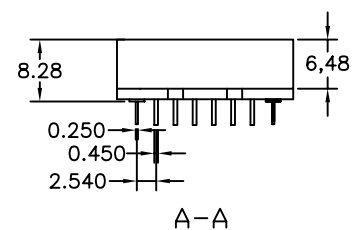

Ordering Information

WPLCC127	XX	XX	A	XX
	No. of Pins 20 ~ 84	Contact Plating 01: Gold Flash 02: Gold 2 μ'' 03: Gold 3 μ'' 04: Tin		Serial Number