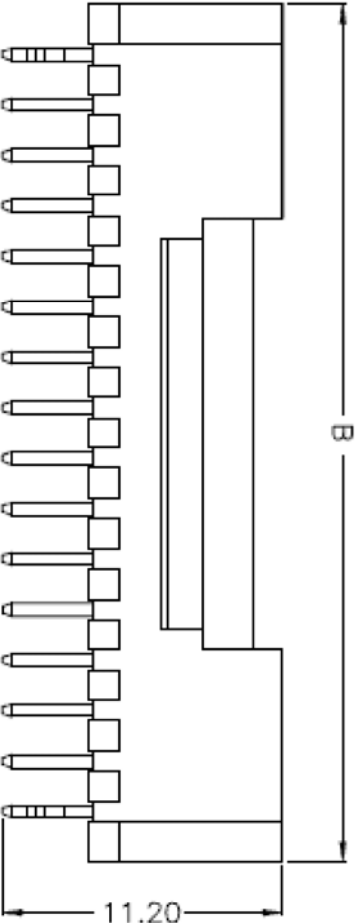
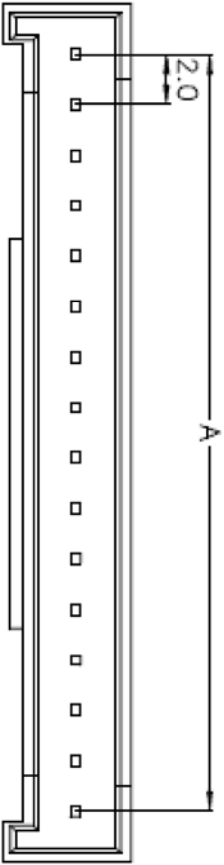


SPECIFICATIONS

- Poles: 2-16
 - Voltage rating: 250V AC, DC
 - Current rating: 2A, AC, DC
 - Withstanding Voltage: 800V AC/minute
 - Insulation resistance:1000MΩ min
 - Temperature range: -25℃~+85℃ (Including temperature rise in applying electrical current)
 - Applicable PC board thickness:0.063" (1.6mm)
 - Contact resistance: Initial Value/10mΩ max
- After environmental testing/20mΩ max

WAFER

- Poles:2-16
- Material:Contact:Brass,Tin plated
- Base:Nylon 66 UL 94V
- Q'ty:500,1000 pcs/bag

Poles	Dimension(mm)	
	A	B
2	2.00	6.00
3	4.00	8.00
4	6.00	10.00
5	8.00	12.00
6	10.00	14.00
7	12.00	16.00
8	14.00	18.00
9	16.00	20.00
10	18.00	22.00
11	20.00	24.00
12	22.00	26.00
13	24.00	28.00
14	26.00	30.00
15	28.00	32.00
16	30.00	34.00

J&B 东莞市骏佳电子科技有限公司 JunJia Electronics Technology Co., Ltd	绘图 (DRAWN)		周 礼 青		投影 (PROJECT)				公差 (TOLERANCE)		料 号 (PART NO)		WBS1771-XXXXA01		页 次 (PAGE)	
	审核 (CHECKED)				单位 (UNIT)		MM		0.0 ± 0.30		图 号 (DRAW NO)		WBS1771-A01		1 / 1	
					比例 (SCALE)		1: 1		± 0.20							
					版本 (EDITION)		A		0.00 ± 0.20							
	核准 (APPROVE)				日期 (DATE)		2008. 09. 28				品 名 (NAME)		2. 0 WAFER 180度 打K			