
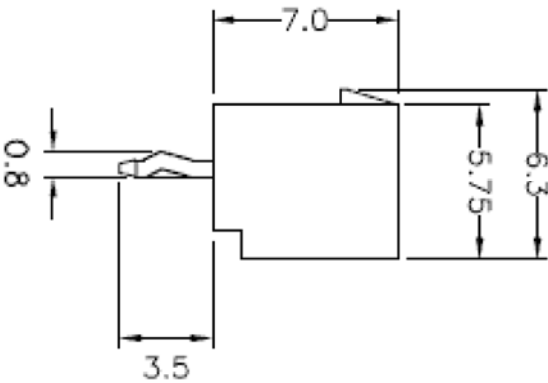
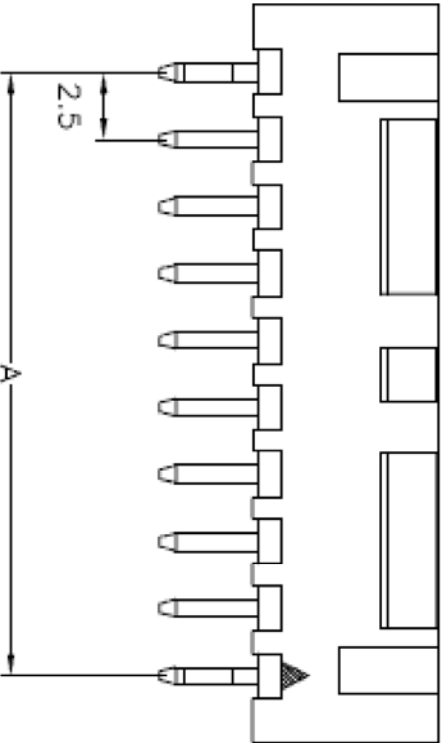


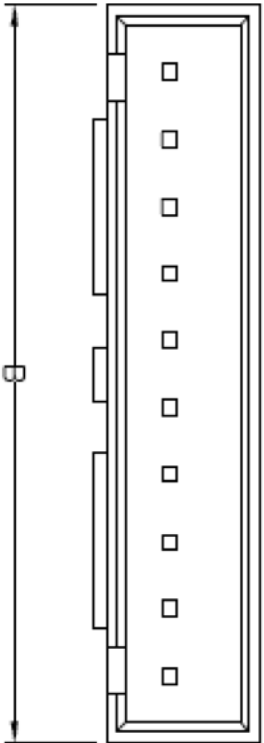

SPECIFICATIONS

- Pole:2-20
- Voltage rating:250V AC DC
- Current rating:3A AC,DC
- Withstanding voltage:1000V AC/minute
- Insulation resistance:100MΩmin.
- Temperature range: -25℃ to+85℃ (including temperature rise in applying electrical current)
- Applicable PC board thickness:0.063"(1.6mm)
- Contact resistance:initial value/10mΩmax.
- After environmental testing/20mΩmax.

WAFER

- Part No.:WZS1701-XXXXXA03
- Poles:2-20
- Material:Contact:Brass,Tin plated Base:Nylon 66 UL 94V-0
- Q'ty:500,1000 pcs/bag

Ordering Information

WZS1701 - XX XX A 03




No. of Pins per Row Contact Plating
02~20 01=Gold Flash
 04=Tin

Duplex Plating
06=Gold Flash/Tin(100u")

Poles	Dimension(mm)	
A	B	
2	2.5	7.5
3	5.0	10.0
4	7.5	12.5
5	10.0	15.0
6	12.5	17.5
7	15.0	20.0
8	17.5	22.5
9	20.0	25.0
10	22.5	27.5
11	25.0	30.0

Recommended PCB Layout



Poles	Dimension(mm)	
A	B	
12	27.5	32.5
13	30.0	35.0
14	32.5	37.5
15	35.0	40.0
16	37.5	42.5
17	40.5	45.0
18	42.5	47.5
19	45.0	50.0
20	47.5	52.5

杨涛		绘图 (DRAWN)	
投影 (PROJECT)		单位 (UNIT)	料号 (PART NO)
		MM	
公差 (TOLERANCE)			
WZS1701-XXXXA03			页次 (PAGE)

审核 (CHECKED)		版本 (EDITION)	A	公差 (TOLERANCE)	0.0 ± 0.30	WZS1701-A03	1/1
核准 (APPROVE)		日期 (DATE)	2006.07.01	0.00 ± 0.20			